


Details Parts Of The Machine



1. push box
2. vertical film feeding
3. pre seal
4. long seal
5. fold on both sides
6. fold down on both sides
7. side seal
8. shaping
9. finished

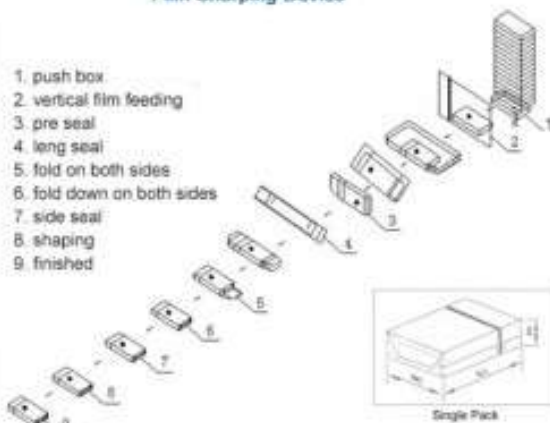

Spesification & Technical Parameter

Model	GZT-200	GZT-260	GZT-350
Packing Speed	20-80bags/min	20-80bags/min	20-50bags/min
Package Length	30-160mm	40-180mm	60-280mm
Package Width	20-100mm	30-120mm	50-160mm
Packing Product Height	10-40mm	10-50mm	30-80mm
Power	220V 50/60Hz 3Kw	220V 50/60Hz 3.5Kw	220V 50/60Hz 4.75Kw
Dimension (L*W*H)	2300*760*1600mm	2400*820*1600mm	2800*960*1650mm
Weight	600KG	650KG	750KG

Main Features

- * Anti-false and moisture-proof.
- * Adjustable to different sizes.
- * Speed stepless adjustable by use frequency.
- * Temperature adjustable.
- * With easy-draught device.
- * PLC Control and Touch screen display for easy operations.
- * All parameter is displayed on the touch screen.
- * This machine with cartoning machine joint production.

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!