




Injection cylinder Magnetic



Injection cylinder

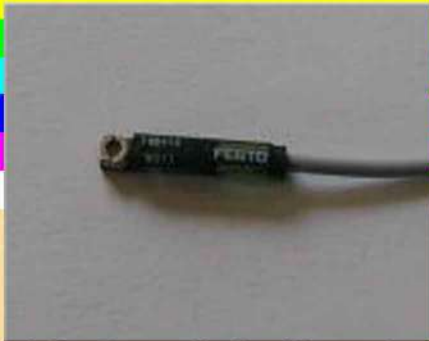

single direction valve



Sealing Pad



Butterfly valve

Note :

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Features:

- SUS 304 Stainless steel construction
- The liquid contact parts are 316L stainless steel
- All contact parts can be Teflon, Vinton and hoses per your requirements.
- No bottle ,no fill, PLC control
- The filling blocked nozzles are anti drops, silk, and auto cut viscous liquid
- Accurate filling volume, within $\pm 1\%$ and a total bottle counter.
- Easy to maintain, no special tools are required.
- Special seals or hoses are adapted if the liquid are corrosive.
- Diving nozzles for bottom up filling of foaming products.

Speed	100Bottles/min per 63ml
Filling Range	50~100mL
Measurement Precision	$\pm 1\%$
Working Power	380/220VAC
Air Pressure	7~9Kg/cm ²
Air consumption	1m ³ /min
Power Rate	0.8kW
Other devices power rate	7.5kW (air compressor = optional)
Net Weight	850Kg



Hoop