



Series of Twin Screw Food Extruder

Large-size Twin Screw Extruder



Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Main Features

- Series of Double-screw Inflating Extruder are consisting of feeding system, extruding system, cutting system, heating system, Gearing system and control ling system.
- Consists of feeding system, extruding system and cutting system, adopt frequency speed controlling with high automation and stable per-formation.
- Automatic lubricating, cooling, to guarantee the extruder running safely.
- According to different material, to choose the relative single or double screw feeding system, the material should be uniformity and stable.
- Screw is made by special technique, is able to bear grinding, steady and reliable, longer using life.
- According to different screw design rate to full different technology request.


Technical Parameter

Power	Installed Power	Actual Consumption	Main Power	Throughput	Dimension	Product
SX65-III A	35KW	28KW	22KW	120-150kg/h	2.5 x 1 x 1.8m	Frying or Without Frying Food
SX65-III B	60KW	40KW	22KW	150-200kg/h	3.51 x 01 x 8m	Frying or Without Frying Food
SX85-II	120KW	60KW	90KW	300-500kg/h	4.0 x 1.2 x 3.0m	Pet/Protein/Snack Food
SX65-I	70KW	40KW	30KW	100-150kg/h	3.5 x 1.0 x 1.8m	Pet/Protein/Snack Food

SX85-II
Twin Screw Extruder



SX65-I
Twin Screw Extruder

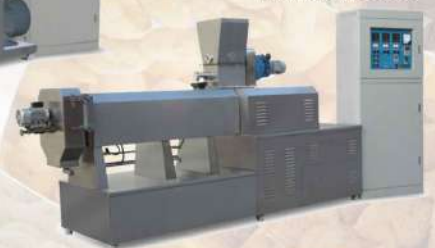

SX65-III A
Twin Screw Extruder



SX65-III B
Twin Screw Extruder