





B

HYZ B Series rubber injection molding machine

MACHINE FEATURES:

Four-column and angle design structure ensure machine durability. Superlarge injection capacity equipped with HTV stuffing. Suitable for producing insulator, arrester, bushing, cable joint and all kinds of silicone rubber unjection parts. It can be equipped with CRB system if you need.

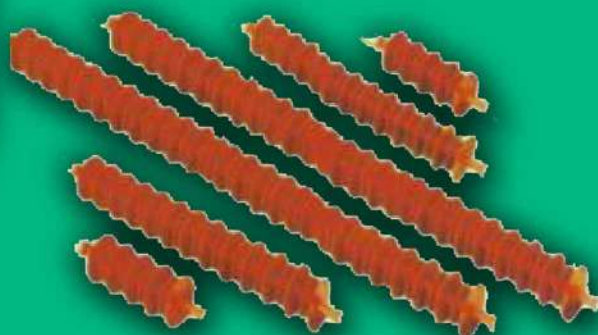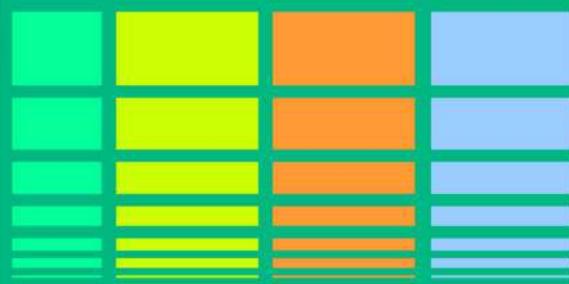

B SERIES MAIN TECHNICAL PARAMETERS

Model	HYZ-200B		HYZ-300B		HYZ-400B		HYZ-500B		HYZ-800B		HYZ-1200B		HYZ-2400B		HYZ-2400B	
Injection volume (cm ³)	2000	2400	3000	4000	4000	10000	10000	15000	28000	40000	30800	40000	60000	80000	80000	100000
Clamping force (KN)	2000		3000		4000		5000		8000		12000		24000		24000	
Platen size (mm)	550x550		550x1300		630x1300		630x1500		800x1600		850x3500		850x5500		1200x3500	
Dimension Btwn Tiebar (mm)	650x360		680x500		770x550		770x550		1240x790		8		12		8	
Space of Platens (mm)	570		780		940		940		1600		1000		1000		800	
Max. Clamping stroke (mm)	500		600		700		700		1000		800		800		700	
Min. Mold thickness (mm)	80		190		250		250		610		210		210		110	
Nozzle diameter (mm)	Φ5.5		Φ8		Φ14		Φ14		4-Φ8		4-Φ8		8-Φ8		8-Φ10	
Arc Radius of Nozzle (mm)	SR19		SR19		SR19		SR19									
Heating power (KW)	12		24		48		48		67		67		170		170	
Total Power	28		50		85		85		120		150		280		280	
Machine (KW) Dimension L x W x H (m)	4x4.5x2.5		4.5x1.6x3.2		5x2x3.5		5.3x2.5x3.5		7.2x3.5x5.3		7.3x6.3x4.2		9x5.5x4.5		9x7x6	
Machine weight (Ton)	8.5		15		18		21		48		65		120		150	

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

