




Standard Function :

- *Separate building roller, increase air exhaust efficiency
- *Natural rotation, reverse rotation, adjustable speed
- *Double rotation speed control, Break control by foot switch
- *To laminate precured tread and medium mat rubber onto the used tyre core pretreated

Parameter	Building Machine
Top roller motor	0.85-1.1kw
Tread pressing motor	550w
Working air pressure	0.1-0.15MPa
Total power	2.2kw
Class of protection	1p44
Voltage	380V 50/60HZ
Building time/pcs	5 minutes
Dimension	1300x2100x1950mm
Weight	1200kg

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

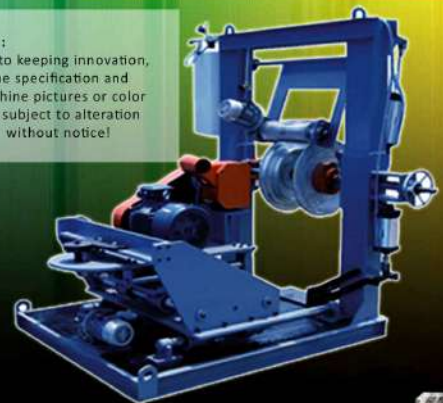

PT. Valtekindo Global Intertek

MBN-41