

J

HYZ_J Series Rubber Injection

Molding Machine

HYZ - 50J

Note :

Due to keeping innovation,
the specification and Machine
pictures or color are subject to
alteration without notice!



The models HYZ-***J


Frame structure
Rating clamping force

Pump Machine

Supplier code

MACHINE FEATURES:

Adopt 'C' type frame total access from the side clamping structure, accurate measurement without check valve. There is no vulcanized rubber in the process of production, enhance efficiency suitable for all kinds of sealing profiles junction and corner molding products.

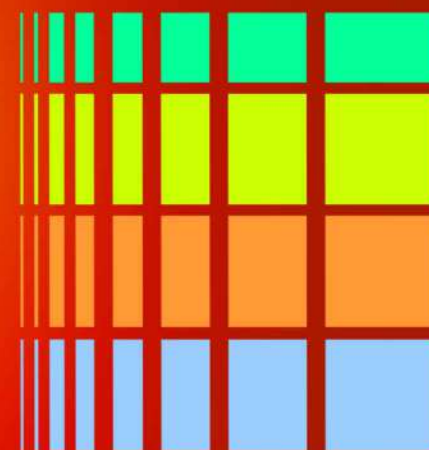

J SERIES

MAIN TECHNICAL PARAMETERS

Model	HYP-20L	HYP-200L
The pressure of material output (Mpa)	0~25	0~25
The speed of material output (L/min)	0~3.5	0~4
The ratio of A,B Synchronizing output	1:1	1:1
The precision of Synchronizing output	1.5%	1.5%
The scale of the material cylinder	20(280mm)	200/20(571.5mm/280mm)
The speed of dyestuff group (L/min)	0~1	0~1
The scale of dyestuff (L)	10	10
Total power (KW)	2.6	5.5
Air pressure (bar)	0.6	0.6
Hydraulic pressure (MPa)	10	10
Machine Dimension L x W x H (mm)	1200 x 770 x 1300	1650 x 1600 x 2000
Machine weight (Ton)	1.5	2