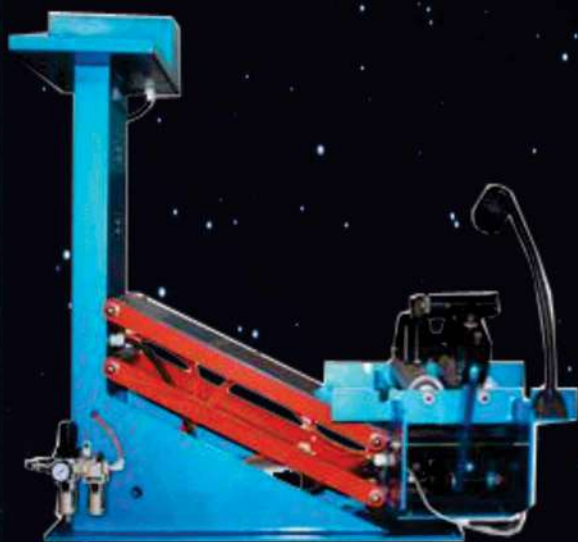


**Note :**

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Tire Expanding & Repairing Machine

Description	15"~24"Hydraulic expansion rim tread Building Machine
Dimension (PxLxT)	1500X1200X2000
Function	After a good tire repair, the combined pressure in the tire tread, the tread and the carcass can be among the effective exclusion of air, configuration 15"~24" expansion hoop, with the tread off, auxiliary alignment function,
Rated Power	380V,50Hz,4Kw

Envelope Spreader

Description	15"~24"Buffing Machine
Dimension (PxLxT)	1800X1700X1500
Function	Top of the child will be old tires, polished by the provisions of the renovation process of the tread arc curvature of the scope of polished 400 ~ 750mm, can be polished to a specific curvature, configuration, 15"~24" tires splint, with vacuum devices, edge devices sidewall..
Rated Power	380V,50Hz,18Kw