



Tread Building Machine

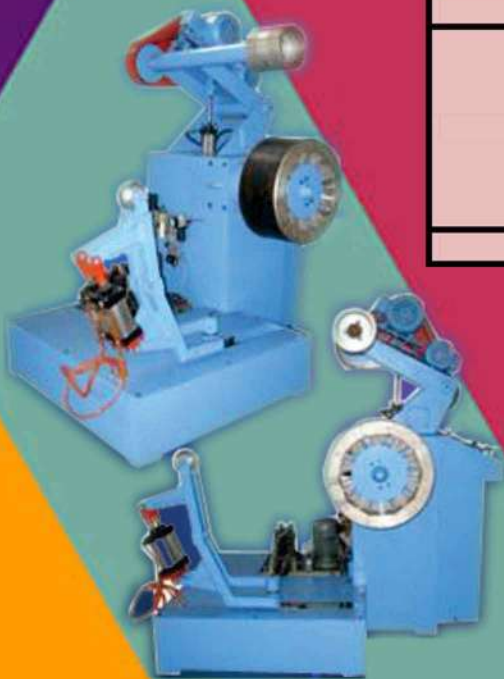

Note :

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Description	15"~24" Hydraulic Expansion rim Tread Lamination Machine
Dimension (PxLxT)	1500x1600x1700
Function	After a good tire repair the combined pressure in the carcass can be among the effective exclusion of air, Configuration 15"~16", 17.5"~19.5", 20"~22.5", 20"~22.5" (wide), 24" Five Expansion hoop, With the tread off, Auxiliary Alignment Function,
Rated Power	380V, 50Hz, 5Kw

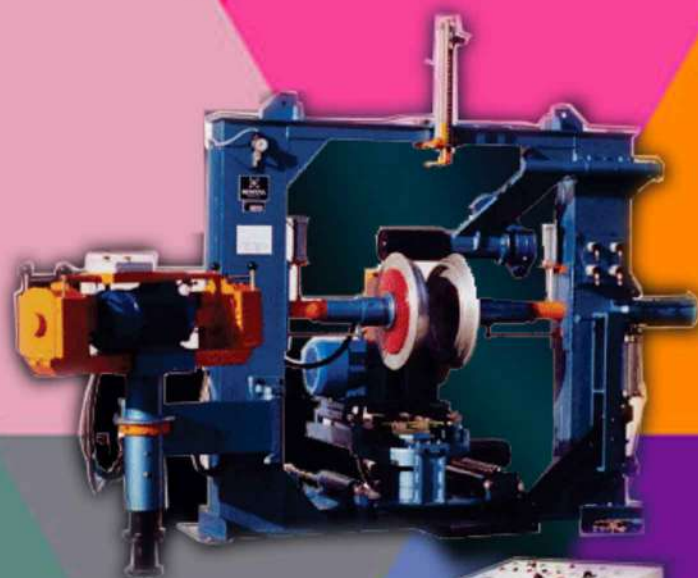

Automatic Buffing Machine

Description	15"~16", 20" ~22.5" Automatic Buffing Machine
Dimension (PxLxT)	2500x2000x2200
Function	Top of the child will be old tires polished by the provisions of the renovation process of the tread arc curvature of the scope of polished 400 ~ 750mm, can be polished to a specific curvature, configuration, 15 " ~ 16", 17.5 " ~ 19.5", 20: ~ 22.5" 24 "four tires splint, with Vacuum devices, edge devices sidewall.
Rated Power	380V, 50Hz, 30Kw

