


Tread Building Machine



Description	15"~24"Hydraulic expansion rim tread Lamination Machine
Overall size(LWH)mm	1500X1600X1700
Function	After a good tire repair, the combined pressure in the tire tread, the tread and the carcass can be among the effective exclusion of air, configuration 15 " ~ 16", 17.5 " ~ 19.5", 20 " ~ 22.5", 20 " ~ 22.5 "(wide), 24" five expansion hoop, with the tread off, auxiliary alignment function,
Rated Power	380V,50Hz,5Kw

Automatic Buffing Machine

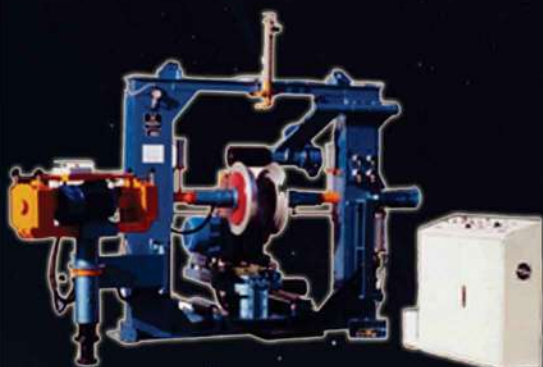

Description	15"~16", 20"~22.5"Automatic Buffing Machine
Overall size(LWH)mm	2500X2000X2200
Function	Top of the child will be old tires, polished by the provisions of the renovation process of the tread arc curvature of the scope of polished 400 ~ 750mm, can be polished to a specific curvature, configuration, 15 " ~ 16", 17.5 " ~ 19.5", 20 " ~ 22.5" 24 "four tires splint, with vacuum devices, edge devices sidewall.
Rated Power	380V,50Hz,30Kw

Tyre expanding & repairing machine



Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Description	Suitable for 24 "inside the tire specifications
Overall size(LWH)mm	1500X1000x1100
Function	Will be opened in order to facilitate the expansion of tire inspection and repair
Rated Power	220V,50Hz,100w