




PE Plastic Drainage panel (Honeycomb Plate) Production Line

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

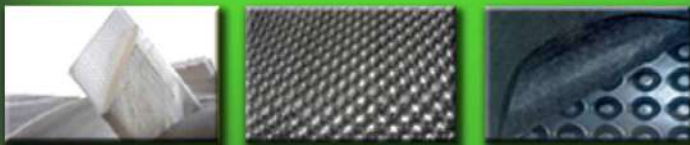

Main Technical Specification.

Model		JG-FWB300	JG-FWB600	JG-FWB1000
Extrude		f 65/28	f 90/30	f 120/33
Screw dia	mm	65	90	120
Width of panel	mm	300	600	1250
Thickness of panel	mm	20-50	20-50	20-50
Type of panel	mm	A : single - slide B : Double - slide		
Installed capacity	kw	73	88	126
Dimension	m	15x1.2x2.8	20x1.8x3.2	30x2.2x3.5

PRODUCT INTRODUCTION

This production line is designed by our company, it is a new kind of product which has filled up the domestic blank. The plastic drainage panel (honeycomb panel) is a kind of good vertical channel which is in allusion to the sullage land, clashing and filling land, saturation viscosity land, groundwork of the mixed fixing. It can handle drainage water concretion to realize the flexible settlement, and it can reduce the time of concretion in order to increase the effective stress of the dust grain to speed the concertion and settlement of the groundwork. So that it can improve the aim of the high strength.

Plastic drainage panel (honeycomb panel) uses PP, PE, PS as material has advantages of easy control, low cost, it has no asymmetry osculum break up face and air-logged situation in the construct process; little break face, little trouble to the groundsill; it is suitable for soft roadbed. Changing parts of auxiliary machine, it can also produce single and double-side drainage panel. It is widely used in the fields of highway, railway, bridge, tube project and underground.