



RG - 18 Series

Low-speed Granulator

Note:

1. is standard allocation. 'O' is selection purchase
2. 'A' is staggered blades.
3. The max. granulating quantity depend on the mesh hole diameter and material quqlity to be granulated
4. The machine voltage specification is 3Ø, 380V, 50Hz
The voltage can be changed as you require.


Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

MODEL: RG-1830

MODEL: RG-1830H

MODEL: RG-1840N

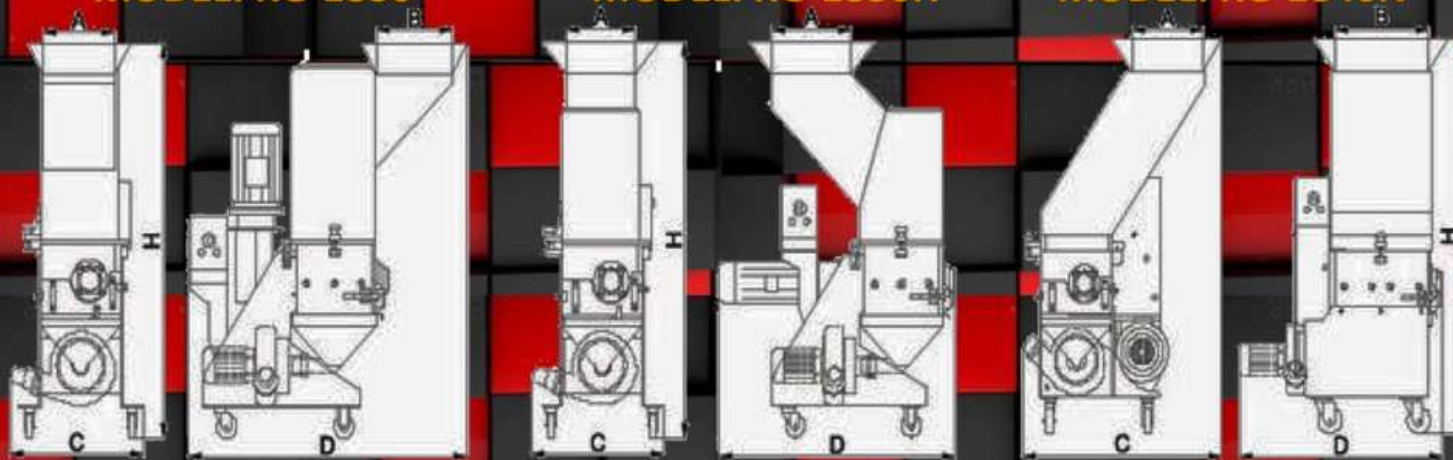

Specifications	机型Model	RG-1820	RG-1820H	RG-1830	RG-1830H	RG-1840N
Power	Kw	1.1	1.1	1.5	1.5	2.2
Rotating speed	r/min	150	150	150	150	200
Rotating blades	PCS	3		6		6
	-A PCS	21	21	30	30	42
Fixed blades	PCS	2	2	2	2	4
Screen hole	mm	Ø6	Ø6	Ø6	Ø6	Ø6
Cutting chamber	mm	270X200	270X200	270X300	270X300	270X400
Output	Kg/h	30-60	30-60	50-80	50-80	70-100
Noise	dB(A)	80-85	80-85	80-85	80-85	80-85
Evacuation Blower	-	●	●	●	●	●
Evacuation Air	-	○	○	○	○	○
Amounted magnetic Iron at charging inlet	-	○	○	○	○	○
Instantaneous recycling system	-	●	●	●	●	●
Weight	Kg	152	145	175	165	193
External size mm						
A		270	270	270	270	270
B		200	200	300	300	400
C		500	500	500	500	860
D		972	812	1065	912	890
H		1327	1350	1327	1350	1840

Please excuse for not note if some specifications of products are changed