



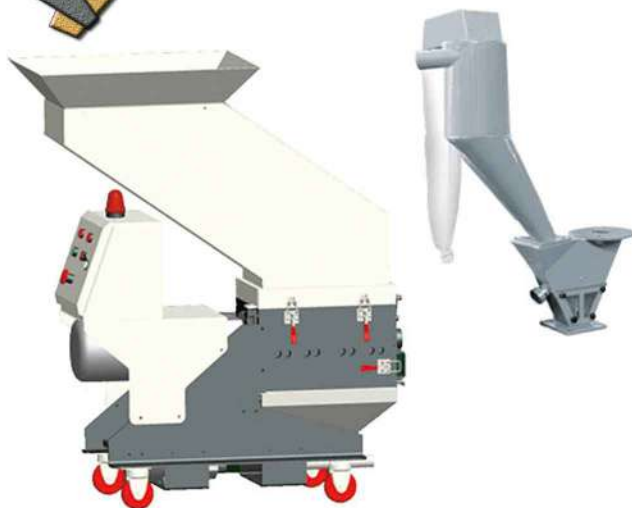

► RG-2040

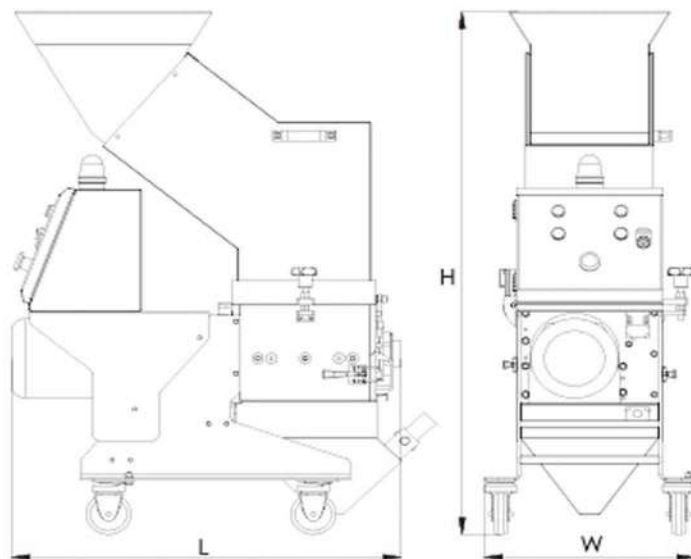

► Specifications 规格表

机型 Model		低速机边粉碎机 Low-speed granulator			
		RG-1820	RG-1830	RG-20235	RG-2040
电机功率 Power	kw	1.1	1.5	3.0	3.0
主轴转速 Rotor speed	rpm	150	150	150	150
转动刀 Rotating blades	pcs	21	30	36	42
固定刀 Fixed blades	pcs	2	2	2	4
筛网孔径 Screen Diameter	mm	φ 6	φ 6	φ 6	φ 6
粉碎室尺寸 Cutting Chamber Size	mm	270 × 200	270 × 300	295 × 350	295 × 400
粉碎能力 Output	kg/h	30 ~ 60	50 ~ 80	80~120	100~150
粉碎时噪音 Noise	dB(A)	80 ~ 85	80 ~ 85	80 ~ 85	80 ~ 85
风机送料系统 Blower Conveying System		●	●	●	●
立即回收系统 Instantaneous recycling system		●	●	●	●
比例阀送料装置 Proportional-valve Conveying Device		○	○	○	○
人工接料箱 Material Box		○	○	○	○
重量 Weight	kg	150	165	200	220
外形尺寸 (主机尺寸) External size					
L	mm	790	880	1100	1190
W	mm	480	480	500	500
H	mm	1350	1350	1350	1350

产品规格若有变更,恕不另行通知。Please excuse for not note if some specifications of products are changed.

Note 注:

- 1) "●" is standard allocation, "○" is selection purchase.
- 2) The max. shredding quantity depend on the mesh holediameter and shredding material quality.
- 3) The varied noise depend on varied shredding material.
- 4) The machine voltage specification is 3Ø,380V,50Hz. The voltage can be changed as you require.

- 1) "●"为标配,"○"为选购。
- 2) 最大粉碎量取决于筛网孔径及粉碎材料等因素。
- 3) 粉碎时噪音因粉碎材料不同而各异。
- 4) 机器电压规格3Ø,380V,50Hz。

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!