



RG-36P SERIES

Plastic pipe Granulator

The plastic-pipe granulators of RG-36P Series, and are mainly used to directly granulate the PVC and PE tubings, PVC sectional and profiled bar. The machine is applicable for crushing long pipes and profiles. The equipped Suction Conveying and Cyclone Dust Separator System bring recycling efficiency into full play. The machine is characterized with compact structure, attractive appearance, convenient operation, optimized rotation knife to achieve lowest energy consumption and higher cutting efficiency.



THE CHARACTER OF THE MACHINE

- > Outside bearing seat design, in order to avoid the dust entering into the bearing, long time using life.
- > Separation design for machine body, convenient for replacing the screen and blades.
- > Screw driven feeding device, save the man power, reduce to pollute raw material, raise the working efficiency.
- > Overloading protector for motor and interlock device, double protection for the safety of personnel and motor.
- > Special knife blade structure adopting shear principle, made of high contented chromium steel, shred the various plastic in an easy way.
- > Knives gap adjustment is available, and the knives can be resharpened numerous times, long time using life.
- > Optimized feeding mouth device make the feeding processing to be smooth.
- > Modern design, nice appearance.
- > Equipped with shock-proof feet, reduce the noise of vibration.



RG-36P

机型Model		RG-3660P
Power	Kw	15
Diameter of rotation	mm	360
Rotating speed	r/min	570
Rotating blades	PCS	6
Fixed blades	PCS	4
Screen hole	mm	Φ12
Feeding mouth	mm	260X540
Cutting chamber	mm	320X600
Feeding blower	—	●
Cyclone separation system	—	●
Output	Kg/h	300-600
Noise	dB(A)	80-95
Weight	Kg	1500
External size mm		
W		1200
L		1830
H		1400

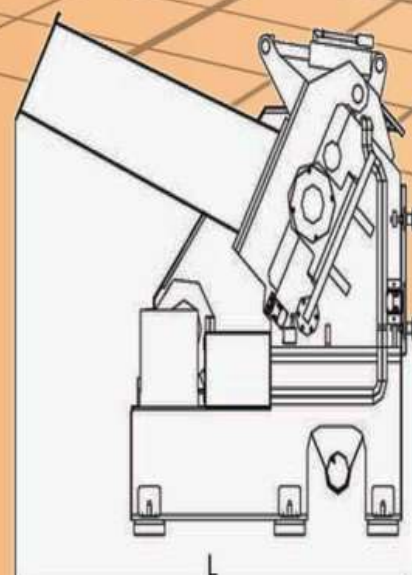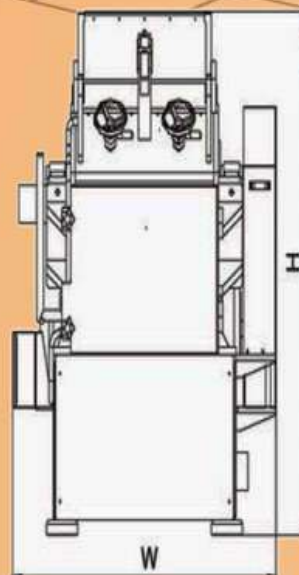

NOTE:

- 1) ● "为标配,"○"为选购。
● "is standard allocation,"○"is selection purchase."
- 2) 最大粉碎量取决于筛网孔径及粉碎材料等因素。
The max. Granulating quantity depend on the mesh hole diameter and material quality to be granulated.
- 3) 机器电压规格为3Φ,380V,50Hz。
The machine voltage specification is 3Φ,380V,50Hz. The voltage can be changed as you require.

Note :
Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!