





Three Layer Bubble Wrap Making Machine

Air Bubble Film Products

Sectional view :

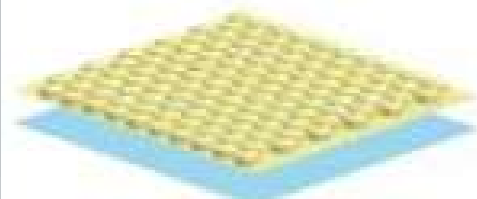

Two-layer air bubble film

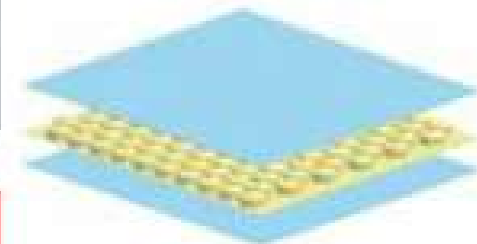


Three-layer air bubble film

— Laminated layer

— Bubble layer

— Flat layer

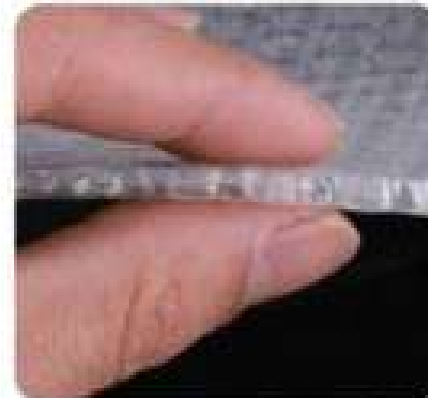

Two-side-flat air bubble film



Two-layer air bubble roll

Parameters

Bubble film width (mm)	1200	1600	2000	2600	3000
Model Number	PT-L352-W1200	PT-L352-W1600	PT-L352-W2000	PT-L352-W2600	PT-L352-W2600
Material	LDPE/LLDPE	LDPE/LLDPE	LDPE/LLDPE	LDPE/LLDPE	LDPE/LLDPE
Line Speed (m/hr)	600 – 2100	600 – 2100	600 – 2100	600 – 2100	600 – 2100
	Thicker layer makes slower speed, for higher speed recommend for double screw				
Capacity (Kg/hr)	80 – 100	100 – 140	110 – 158	120 – 180	160 – 220
Thickness (g/m ²)	38 – 300	38 – 300	40 – 300	45 – 300	45 – 300
	depends on the optional attachment				
Main screw diameter (mm)	φ75	φ75	φ80	φ90	φ130
Sub screw diameter (mm)	φ50	φ50	φ65	φ75	φ80
Heating power (kW)	72	88	110	130	168
Operation Power (kW)	36	44	55	69	79
Installation Power (kW)	100	136	159	202	254
Dimension L(m) × W(m) × H(m)	10 × 5.0 × 2.5	10 × 6.0 × 2.5	11 × 6.5 × 2.5	12 × 7.5 × 2.5	12 × 8.2 × 2.5
Weight (Kg)	6000	6500	7500	8500	11000

Optional Upgrades

- Double-screw design (increase capacity)
- Forming roller with larger diameter (increase speed)
- Water chiller (improve cooling effect)
- PLC control and touch screen (user friendly)
- Automatic cutter & rewinder (save labor cost)
- Fast filter changer (electric or hydraulic)
- Water chiller (capacity + 20% – 30%)
- Adjustable T-die (Online adjust 300mm film width on each side)

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!