



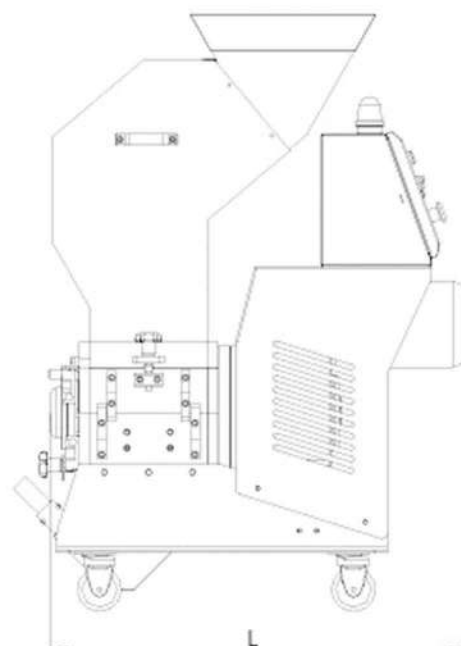

► RG-2427

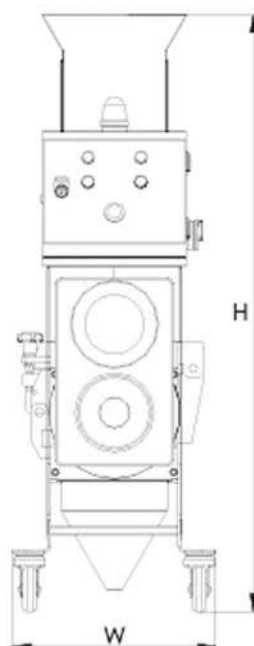

► Specifications 规格表

机型 Model		慢速机边粉碎机 Slow-speed granulator			
		RG-2417	RG-2427	RG-2436	RG-2446
电机功率 Power	kw	0.75	1.5	2.2	2.2
主轴转速 Rotor speed	rpm	37	37	34	34
转动刀 (爪刀) Rotating blades	pcs	1	2	3	4
转动刀 (齿刀) Rotating blades	pcs	2	3	4	5
固定刀 Fixed blades	pcs	4	6	8	10
粉碎室尺寸 Cutting Chamber Size	mm	240 × 170	240 × 270	240 × 360	240 × 420
粉碎能力 Output	kg/h	8~10	10~15	15~25	25~35
粉碎时噪音 Noise	dB(A)	60~75	60~75	60~75	60~75
风机送料系统 Blower Conveying System		●	●	●	●
立即回收系统 Instantaneous recycling system		●	●	●	●
比例阀送料装置 Proportional-valve Conveying Device		○	○	○	○
人工接料箱 Material Box		○	○	○	○
重量 Weight	kg	265	310	360	390
外形尺寸 (主机尺寸) External size					
L	mm	840	940	1040	1140
W	mm	470	470	470	470
H	mm	1470	1470	1470	1470

产品规格若有变更,恕不另行通知。Please excuse for not note if some specifications of products are changed.

Note 注:

- 1) ● "is standar allocation, ○ "is optional purchase;
- 2)The max. output depends on screen dia. and material qulaity;
- 3)The varied noise depend on varied material;
- 4)The standard power voltage is 3φ 380V 50Hz; other voltage is available.

- 1)● "为标配件, ○ "为选购件。
- 2)最大粉碎量取决于粉碎材料等因素。
- 3)粉碎时噪音因粉碎材料不同而各异。
- 4)机器电压规格为3φ 380V 50Hz。

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!