





Two Layer Single Screw Air Bubble Film Making Machine

Air Bubble Film Products

Sectional View :

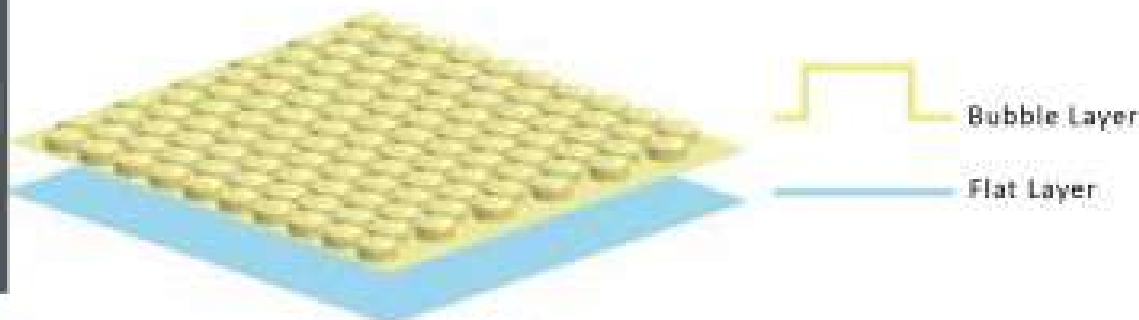

Two-layer air bubble film

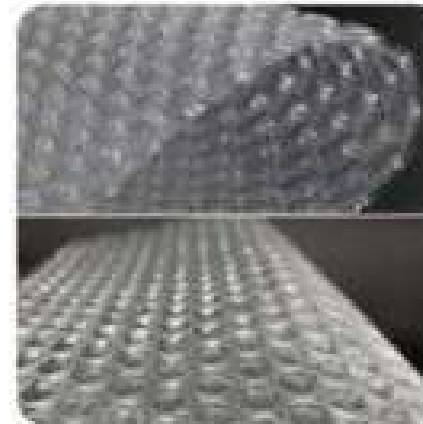

Superior quality of produced two layer air bubble film

Parameters

Complete film width (mm)	1200	1600	2000	2600	3000
Model number	PT-L2S1-W1200	PT-L2S1-W1600	PT-L2S1-W2000	PT-L2S1-W2600	PT-L2S1-W3000
Material	LDPE/LLDPE	LDPE/LLDPE	LDPE/LLDPE	LDPE/LLDPE	LDPE/LLDPE
Line speed (m/hr)	600 - 2100	600 - 2100	600 - 2100	600 - 2100	600 - 2100
Capacity (Kg/hr)	50 - 70	60 - 80	70 - 95	90 - 130	100 - 180
Thickness (g/m ²)	25 - 300	25 - 300	28 - 300	30 - 300	34 - 300
	<i>depends on the optional attachment</i>				
Main screw diameter (mm)	φ75	φ75	φ85	φ90	φ110
Heating power (kW)	37	48	60	68	81
Operation power (kW)	25	34	38	50	68
Installation power (kW)	56	74	92	107	130
Dimension L(m) × W(m) × H(m)	7 × 2.0 × 2.5	7 × 2.4 × 2.5	8 × 2.8 × 2.5	9 × 3.4 × 2.5	10 × 3.8 × 2.5
Weight (Kg)	3500	4500	5000	7000	9000

* Recommended FMI of LDPE material is 2.0 ~ 2.5; We support custom solutions according to your needs

Optional Upgrades

- Double-screw design (increase capacity)
- Forming roller with larger diameter (increase speed)
- Water chiller (improve cooling effect)
- PLC control and touch screen (user friendly)
- Automatic cutter & rewinder (save labor cost)
- Fast filter changer (electric or hydraulic)
- Water chiller (capacity + 20% ~ 30%)

Note:
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!