


Crawler Excavator

SWE230LC

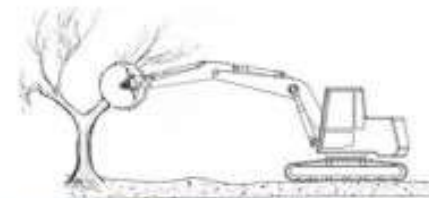

Engine

Make	CUMMINS
Type	Six-cylinder, water-cooled turbocharged, mechanical injection
Rated power	112KW
Rated speed	2100rpm

Hydraulic System

Hydraulic flow rate	2×235L/min
Hydraulic pressure	30MPa

Operating Scope

Stick length	3000mm
A: Max. cutting height	9520mm
B: Max. dumping height	6800mm
C: Max. digging depth	6830mm
D: Max. reach	10400mm

Main Technical Specification

Operating weight	23000Kg
Standard bucket capacity	1.0m ³
Slewing speed	13rpm
Stick digging force	100KN
Bucket digging force	130KN

Travelling System

Travelling speed	3~5km/h
Grade ability	65%
Ground pressure	0.045MPa

Main Features


Dual hydraulic pump system
Advanced electrical system
Advanced ground pressure reducer
Special preferential hydraulic system
Ergonomically designed cab

Main Applications

Hydro-electric project
Small-scale mining
Road construction
City dwellings construction
Sea port and airport
Road repairing project

Dimensions

Overall length	9845mm
Overall width	3000mm
Overall height of boom	3300mm
Overall height of cab	2755mm
Engine cover height	2300mm
Counterweight clearance	1060mm
Ground clearance	465mm
Upperstructure width	2710mm
Rear-end length/Slewing radius	2940mm
Overall track length	4510mm
Track length on ground	3720mm
Track gauge	2400mm
Track width	600mm
Boom slewing angle(L/R)	0°

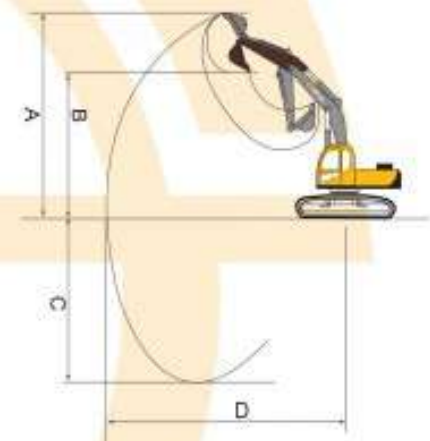

Optional

Hydraulic breaker
Quick coupler

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!