

Crawler Excavator

SWE330LC



Engine

Make	CUMMINS
Type	Six-cylinder, water-cooled turbocharged, mechanical injection
Rated power	241KW
Rated speed	2200rpm

Hydraulic System

Main pump	KAWASAKI
Main valve	KAWASAKI
Motor	KAWASAKI
Hydraulic flow rate	2×260L/min
Hydraulic pressure	34MPa

Operating Scope

Stick length	3200mm
A: Max. cutting height	9617mm
B: Max. dumping height	6667mm
C: Max. digging depth	6536mm
D: Max. reach	10028mm

Main Technical Specification

Operating weight	34100Kg
Standard bucket capacity	1.70m ³
Slewing speed	11rpm
Stick digging force	104KN
Bucket digging force	137KN

Travelling System

Travelling speed	2.9-5.1km/h
Grade ability	65%
Ground pressure	0.069MPa

Main Features

Dual hydraulic pump system
Advanced electrical system
Special preferential hydraulic system
Ergonomically designed cab

Dimensions


Overall length	10686mm
Overall width	3280mm
Overall height of boom	3540mm
Overall height of cab	3145mm
Engine cover height	2650mm
Counterweight clearance	1235mm
Ground clearance	470mm
Upperstructure width	2960mm
Rear-end length/Slewing radius	3215mm
Overall track length	4690mm
Track length on ground	3780mm
Track gauge	2580mm
Track width	600mm
Boom slewing angle(L/R)	0°

Main Applications

Hydro-electric project
Mining
Road construction
City dwellings construction
Pipe laying and road repair projects

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

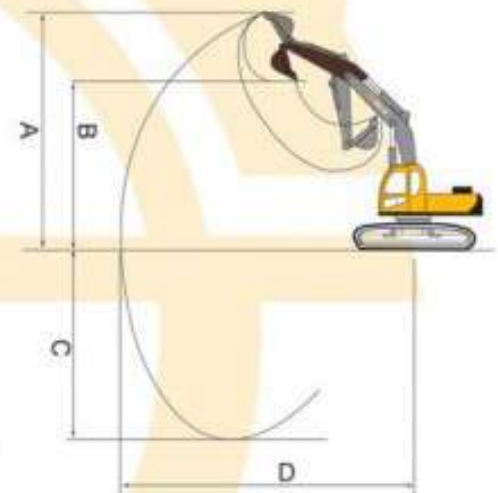

Optional

Hydraulic breaker
Quick coupler