



Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Transverse Cutting Machine

size	Min. Spacing of Wries	Range of Ascillation(mm)	Diameter of Cutting Wire(mm)	Outline Dimensions		
				Length(mm)	Width(mm)	Height(mm)
4.2x1.2x0.6	10mm	7.5	Φ0.6- Φ1.0	5200	3200	3560
4.8x1.2x0.6	10mm	7.5	Φ0.6- Φ1.0	5900	3200	3560
6.0x1.2x0.6	10mm	7.5	Φ0.6- Φ1.0	7200	3200	3560


Longitudinal Cutting Machine

size	Min. Spacing of Wries	Diameter of Cutting Wire		Outline Dimensions		
		For Horizontal Cutting (mm)	For Side Trimming (mm)	Length(mm)	Width(mm)	Height(mm)
4.2x1.2x0.6	5mm	Φ0.6- Φ0.8	Φ0.8	5500	2860	2500
4.8x1.2x0.6	5mm	Φ0.6- Φ0.8	Φ0.8	5500	2860	2500
6.0x1.2x0.6	5mm	Φ0.6- Φ0.8	Φ0.8	6500	2860	2500

Cutting trolley

size	Max Travelling Speed	Reductor (Brake Motor)	Outline Dimensions		
			Length(mm)	Width(mm)	Height(mm)
4.2x1.2x0.6	17.5m/min	GS77-Y3-4P-2.8.41-M3	3600	1700	1160
4.8x1.2x0.6	17.5m/min	GS77-Y3-4P-28.41-M3	4200	1700	1160
6.0x1.2x0.6	17.5m/min	GS77-Y3-4P-28.41-M3	5400	1700	1160

CROSS CUTTING

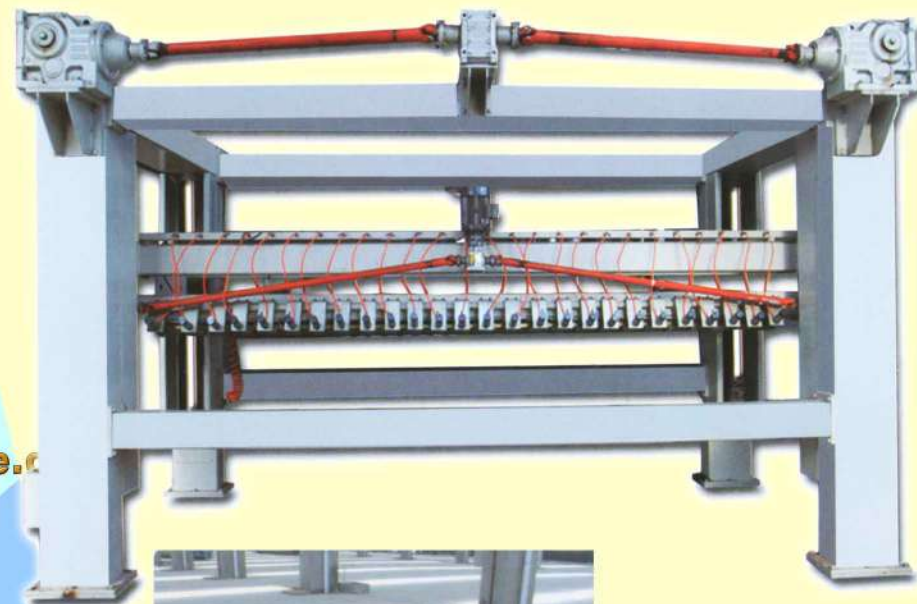

**Frequency
Conversion Cutting
Trolley**



Cutting Rail

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!