




DLD12 ~ 0.4 ~ 1

DLD6 ~ 0.4 ~ 2



DLD12 ~ 0.4 ~ 2

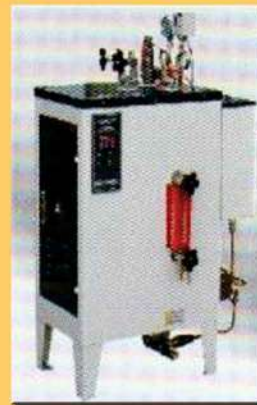

DLD12 ~ 0.4 ~ 1



DLD6 ~ 0.4 ~ 1



Diverged Steam outlet valve



Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

The main performances & Parameters

Parameter	DLD ~ 0.4 – 1(2)	DLD12 (9) ~ 0.4 1 (2)
Model		
Power Source	220V, 1PH, 50Hz 380V, 3PH, 50Hz	380V, 3PH, 50HZ
Heating Power (KW)	6	12 (9)
Volume (L)	16.1	16.1
Operating Pressure (MPa)	0.4	0.4
Steam Output (kg/h)	9	17 (13)
Starting Time (min)	12 (9)	9 (12)
Outline Dimension	680 X 490 X 980 (Sonde) 680 X 405 X 1126 (Floating Ball)	635 X 500 X 980 (Sonde) 630 X 380 X 1200 (Floating Ball)



Safety Valve



Air Switch