


System Installation Drawings

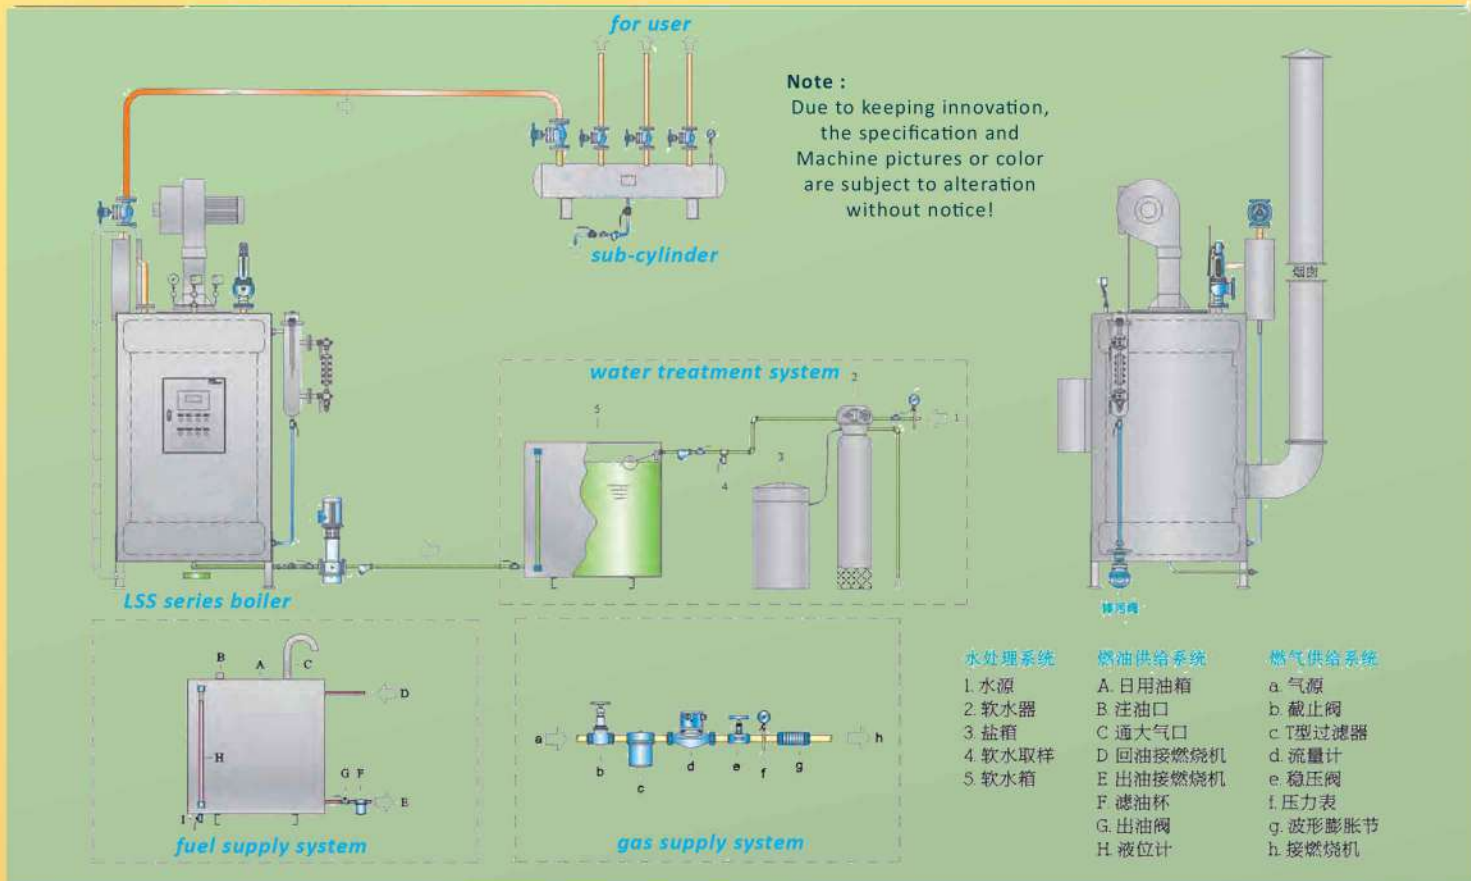

Technical Parameter

Type		Unit	LSS0.5-0.7 -Y.Q	LSS1-1.0 -Y.Q	LSS1.5-1.0 -Y.Q	LSS2-1.0 -Y.Q
Project						
Rated evaporation		t/h	0.5	1.0	1.5	2.0
Rated working pressure		MPa	0.7	1.0	1.0	1.0
Saturated steam temperature		℃	170	184	184	184
Fuel consumption	Light diesel oil	kg/h	35	70	105	140
	Natural gas	Nm³/h	40	80	120	160
	Liquefied gas	Nm³/h	15	30	45	60
	Pipeline gas	Nm³/h	85	170	265	340
Main steam valve diameter		DN	40	50	65	80
Safty valve diameter		DN	40	50	50	40 × 2
Infall diameter		DN	25	25	32	40
Sewage valve diameter		DN	40	40	40	40
Chimney diameter		DN	250	350	400	500
Overall size	L	mm	1830	1980	2045	2550
	W	mm	1780	1980	2220	2780
	H	mm	2650	3080	3380	3620
	φ	mm	1180	1380	1680	1980
Weight		T	2.2	2.8	4	5.2

According to customer order requirements, the company can provide customized products for specific power supply in the world.