


System Installation Drawings

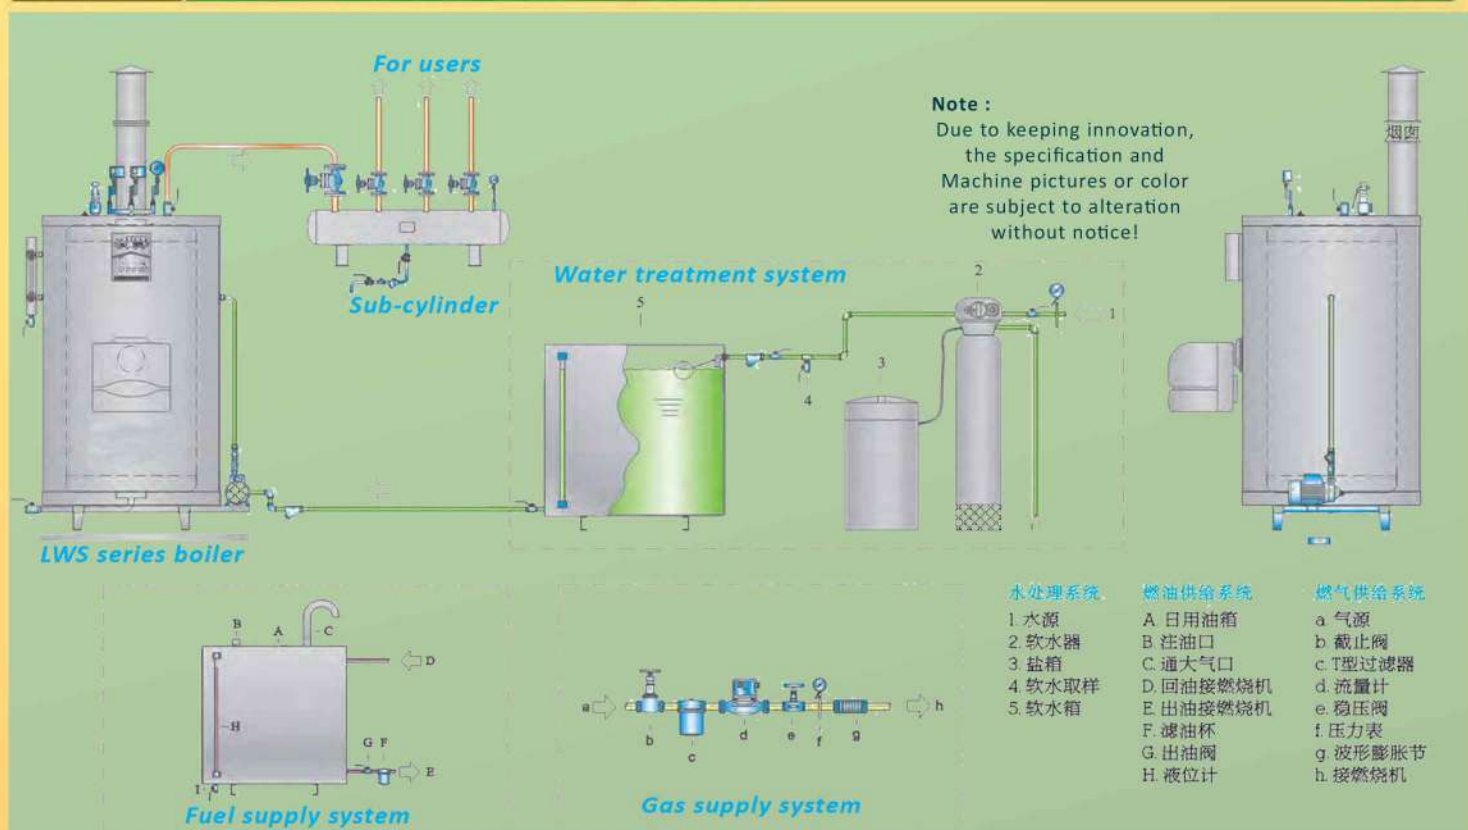

Technical Parameter

Type		Unit	LWS0.1 -0.7-Y.Q	LWS0.15 -0.7-Y.Q	LWS0.2 -0.7-Y.Q	LWS0.3 -0.7-Y.Q
Project						
Rated evaporation		t/h	0.1	0.15	0.2	0.3
Rated working pressure		MPa	0.7	0.7	0.7	0.7
Saturated steam temperature		℃	170	170	170	170
Fuel consumption	Light diesel oil	kg/h	7	10.5	14	21
	Natural gas	Nm³/h	8	12	16	24
	Liquefied gas	Nm³/h	3	4.5	6	9
	Pipeline gas	Nm³/h	17	25.5	34	51
Main steam valve diameter		DN	25	25	32	32
Safty valve diameter		DN	25	25	25	25
Infall diameter		DN	15	15	15	25
Sewage valve diameter		DN	20	20	25	25
Chimney diameter		DN	120	150	150	200
Overall size	L	mm	1020	1150	1260	1270
	W	mm	1080	1260	1400	1570
	H	mm	1750	1840	2160	2400
	φ	mm	750	880	960	1000
Weight		kg	470	610	780	850

According to customer order requirements, the company can provide customized products for specific power supply in the world.