


System Installation Drawings

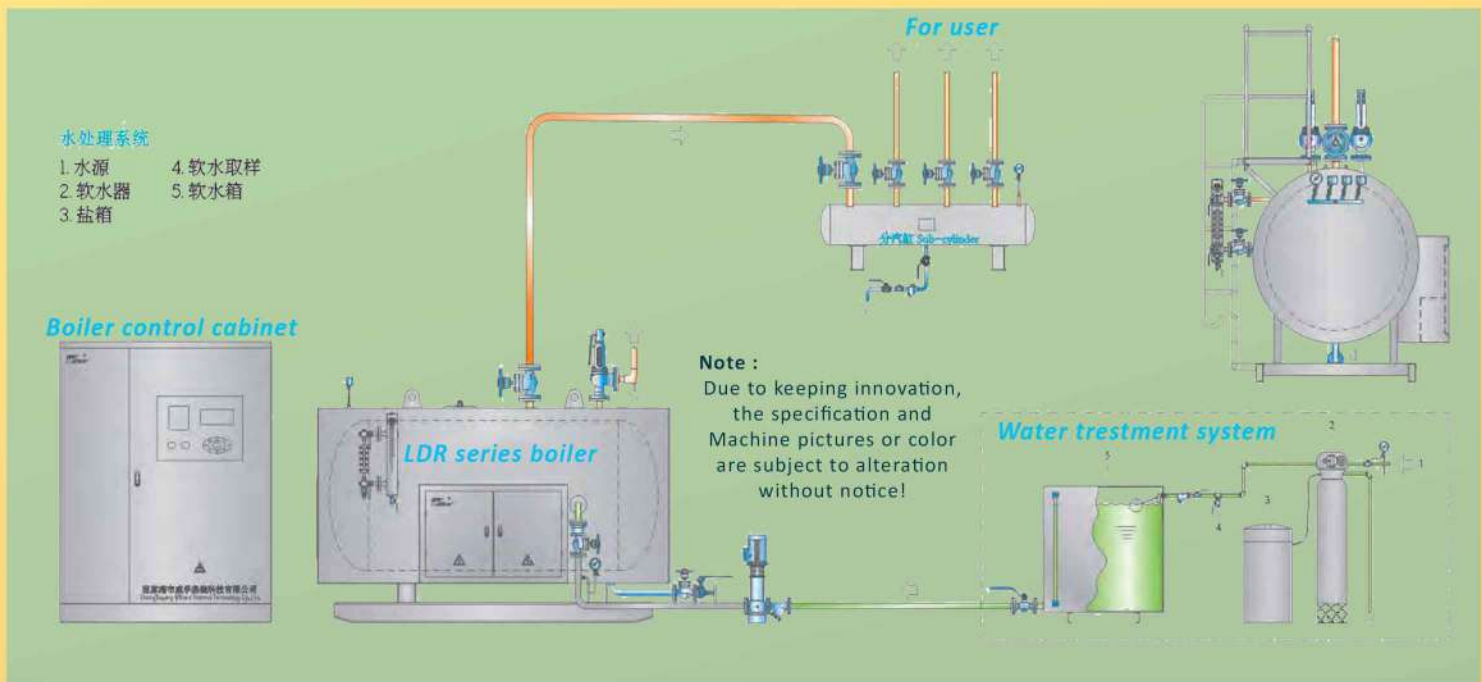

Technical Parameter

Type			WDR0.75 -1.0	WDR1 -1.0	WDR1.5 -1.0	WDR2 -1.0	WDR3 -1.0	WDR4 -1.25
Project		Unit						
Rated evaporation		t/h	0.75	1	1.5	2	3	4
Rated working pressure		MPa	1.0	1.0	1.0	1.0	1.0	1.25
Saturated steam temperature		℃	184	184	184	184	184	193
Input Power		KW	540	720	1080	1440	2160	2880
Input current		A	810	1080	1620	2160	3240	4320
Rated voltage		V	3N AC 50Hz 380V					
Main steam valve diameter		DN	50	50	65	80	80	100
Safety valve diameter		DN	2 × 40	2 × 40	2 × 40	2 × 40	2 × 40	2 × 50
Infall diameter		DN	25	25	25	25	40	40
Sewage valve diameter		DN	40	40	40	40	40	40
Overall size	L	mm	2800	2950	3450	3650	3950	4100
	W	mm	1800	1900	2180	2200	2300	2480
	H	mm	1550	1600	2100	2500	2650	2980
Control cabinet overall size	L	mm	1200	1200	1500	1800	2100	2400
	W	mm	500	600	600	600	600	600
	H	mm	1800	1800	2000	2000	2200	2200
Weight		T	2.0	2.2	2.7	3.3	4.1	5.2

According to customer order requirements, the company can provide customized products for specific power supply in the world.