


1. Mantle and concave are made of manganese steel, which is durable for crushing hard stones and saves cost for client on spare parts.
2. Lubrication oil sealing system can prevent the dust into working parts main (shaft) to reduce the frequency of maintenance and prolong service life.

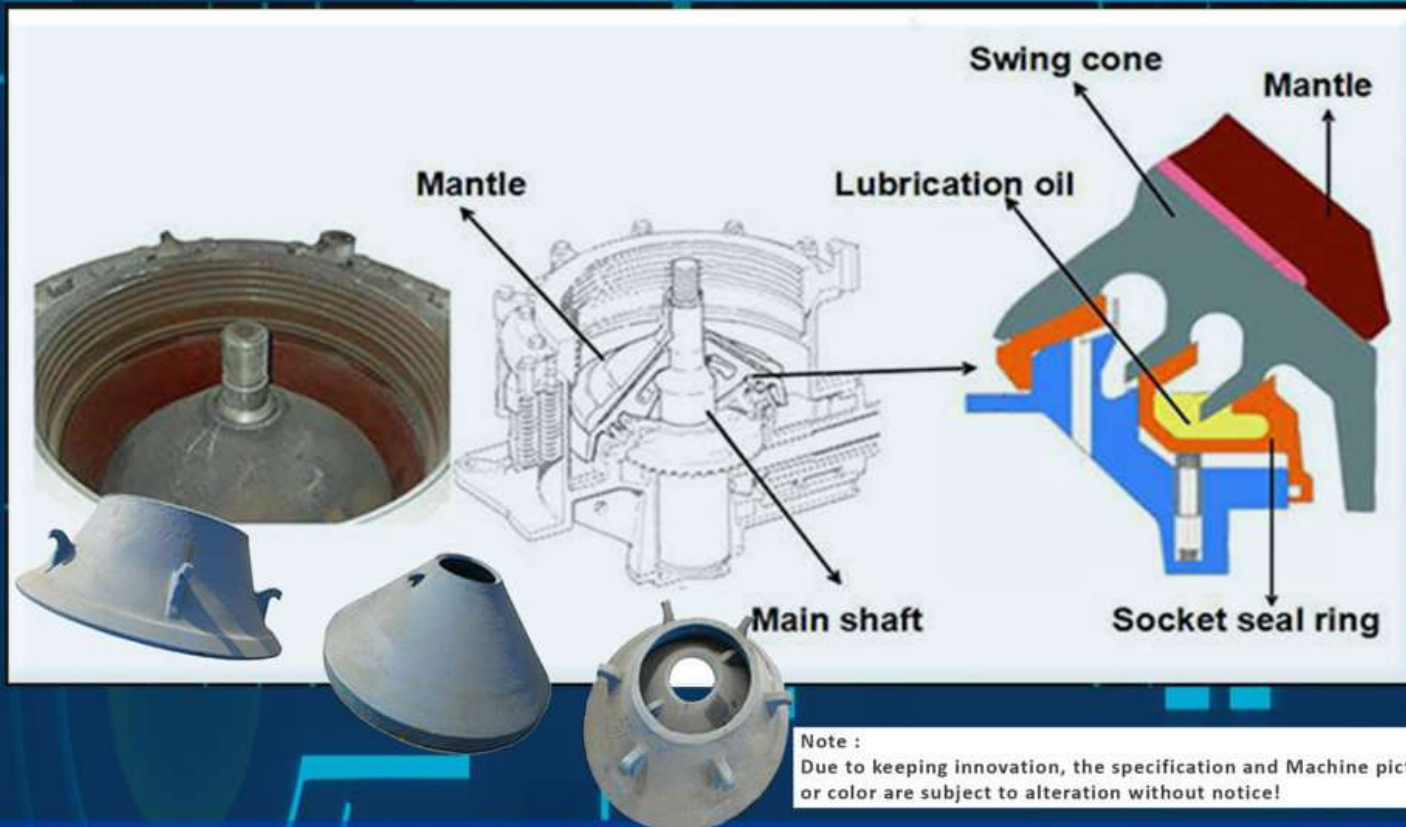

H series Standard Type Cone Crusher Technical Parameters						
Type	Max. Feed size (mm)	Adjustable range of discharge opening (mm)	Capacity (T/hour)	Weight (Tons)	Motor power (kW)	Overall dimension (mm)
H30B	65	12~25	20~40	5	30	2700x1300x1630
H30D	35	5~13	12~25	5	30	2700x1300 x1630
H55B	115	15~50	50~100	10	55	3050x1640x2350
H55Z	60	8~20	32~65	10	55	3050x1640x2550
H55D	50	6~15	25~50	10	55	3050x1640x2550
H130B	160	22~50	120~230	22	130	3930x2190x2550
H130Z	100	15~30	70~160	22	130	3930x2190x2550
H130D	70	8~19	60~140	22	130	3930x2190x550
H200T	275	55~75	400~560	45	180	5230x3460x3550
H200B	215	30~60	285~460	45	180	5230x3460x3550
H200Z	155	16~38	160~320	45	180	5230x3460x3550
H200D	95	10~25	130~280	45	180	5230x3460x3550
H320B	300	30~65	600~1200	80	320	5930x4100x4300
H320Z	230	16~38	300~600	80	320	5930x4100x4300
H320D	100	10~25	180~450	80	320	5930x4100x4300

B=Corse Crushing Cavity Type with Big Mouth for Corse Crushing

Z= Medium Crushing Cavity Type with Medium for Secondary and tertiary Crushing

D=Short - Headed Cavity Type with Small mouth for Round Crushing