


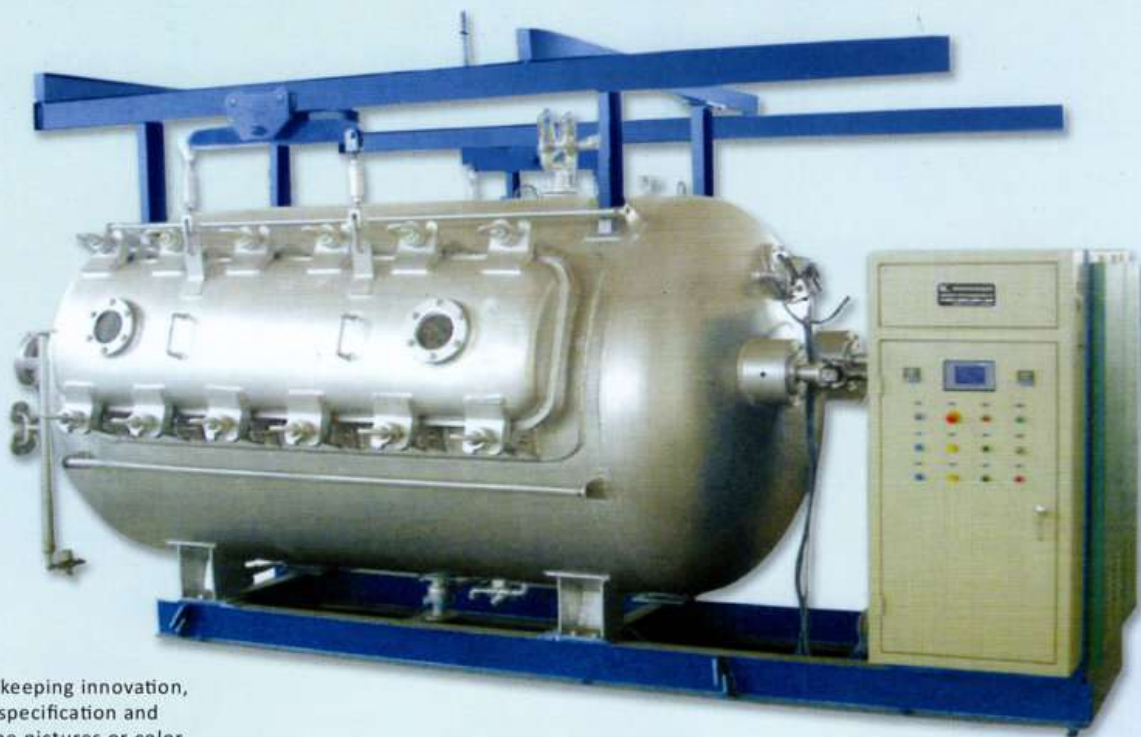

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Jigger

- ◆ The jigger is used for desizing, scouring, bleaching and dyeing processes of different kinds of fabrics such as cotton, polyester, nylon, linen, silk, etc. The jigger is inverter and PLC controlled. Constant speed and constant tension can be achieved in the jigger. The temperature inside the dyeing tank is automatically controlled.

Features

- * Type : Normal temprature normal pressure or high temprature high pressure
- * Working width : 1600 - 3400 mm
- * Batching diameter : 300mm - 1400mm
- * Speed : 0 - 150 m/min
- * Tension range : 0 - 80 kg
- * Danfoss inverter for batching rollers
- * Siemens PLC

