


Cone Crusher Series Plant

High capacity, efficiency, medium and fine crushing, high adaptability crushing-screening processing, Self-load belt conveyor

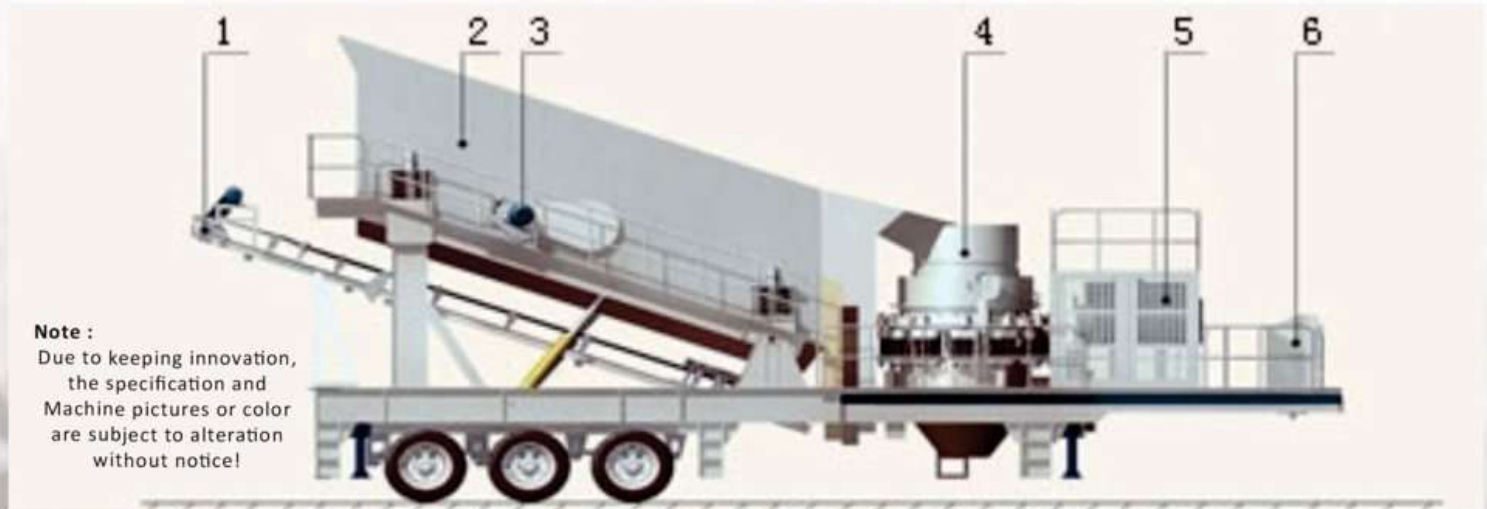

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

1. Belt Conveyor
4. Cone Crusher

2. Vibrating Screen
5. Motor Of Cone Crusher

3. Motor Of Vibrating Screen
6. Electronic Switch Box

Specification and Technical Parameter

Parameter Model	Length L1	Width B1 (mm)	Height H1 (mm)	Max. Height H2 (mm)	Max. width B2 (mm)	Belt conveyor(down) H3 (mm)	Wheel	Weight(t)
M3S1548Y55	13000	2550	4300	14000	2800	4000	Paratactic double axles	43
M3S1848Y90	13000	2800	4500	6700	3000	4000	Paratactic double axles	47
M3S1860Y160	14000	2800	4500	6700	3000	4200	Paratactic tri- axle	53
M3S2160Y220	14000	3000	4500	6700	3200	4200	Paratactic tri- axle	58
M3S1848Y90Z	18000	2800	4500	6700	3000	4000	Paratactic quarter- axle	55
M3S1860Y160Z	18000	3000	4500	6700	3000	4200	Paratactic quarter- axle	61
M3S2160Y220Z	18000	3000	4500	6700	3200	4200	Paratactic quarter- axle	66

Specification and Technical Parameter

Parameter Model	Vibrating screen	Cone crusher	Belt conveyor (down)	Belt conveyor (Up)	Belt conveyor	Capacity (t/h)	Power(kw)	Remarks
M3S1548Y55	YA1548	PYB900	B500X7M			50-90	75	
M3S1848Y90	YA1848	HCS-90	B650X7M			65-130	99-134	
M3S1860Y160	YA1860	CS-160	B650X8M			110-455	212.5-220.5	
M3S2160Y220	YA2160	HPC-220	B800X8M			140-330	257.5-264.5	
M3S1848Y90Z	YA1848	HCS-90	B650X7M	B650X16M	B650X10M	65-130	112.5-147.5	Self-loading
M3S1860Y160Z	YA186	OCS-160	B650X8M	B800X17M	B800X11M	110-4552	35.5-243.5	Self-loading
M3S2160Y220Z	YA2160	HPC-220	B800X8M	B1000X17M	B1000X11M	140-330	287.5-294.5	Self-loading

