


Impact Crusher

Dealing with the material with the side length below 500mm, not more than 250MPa anti-pressure strength, Impact crusher can be widely used in crushing the coarse, medium, and fine material (E.g. granite, limestone, concrete). During the process of operating, the rotor at high speed will be brought along by the electric motor. The material will be impacted by the Flat Hammer to be crushed, and then be countered to the liner for the second crushing, then be discharged through the discharge opening. Impact Crusher features many advantages: simple structure, non-key connection, high chromium flat Hammer, special impact plate, simplified crushing process, and high-efficiency and energy conservation, cubic shaped desired products. The discharge opening can be adjusted. It is widely used in water and electricity, expressway, sand and stone crushing fields.

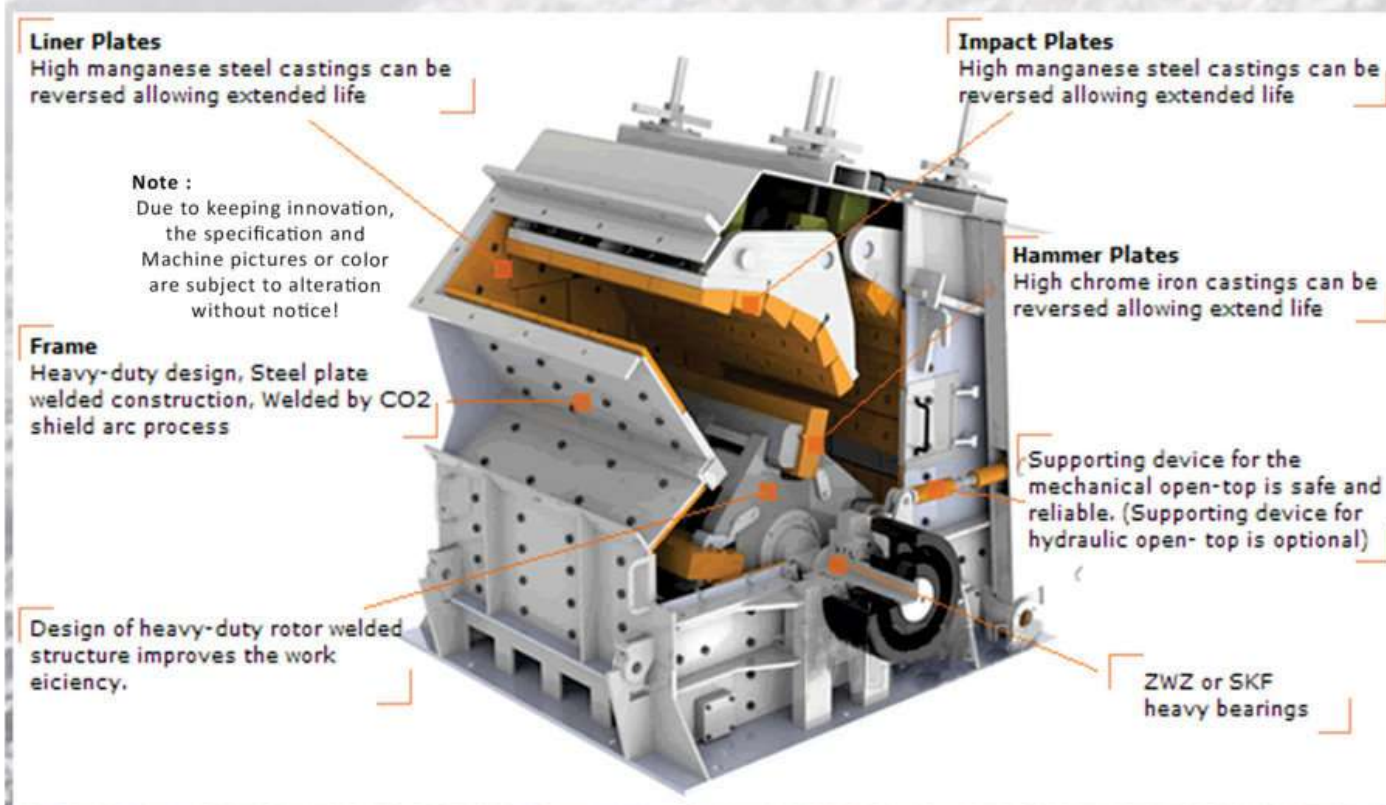

Specification and Technical Parameter of PF Series Impact Crusher

Model	Specification (mm)	Feed Opening (mm)	Max. Feeding Size (mm)	Capacity (t/h)	Model of Motor	Power (kw)	Weight (t)	Overall Dimensions (L×W×H) (mm)
PF-1007	Φ1000×700	400×730	300	35-50	Y250M-6	37	9.5	1800×1600×1800
PF-1010	Φ1000×1050	400×1080	350	50-80	Y315S-6	75	14	2340×2007×2500
PF-1210	Φ1250×1050	400×1080	350	70-120	Y315L1-6	110	17	2582×2053×2809
PF-1212	Φ1250×1200	400×1250	350	70-140	Y315L2-6	132	17.5	2582×2203×2809
PF-1214	Φ1250×1400	400×1430	350	80-160	Y315L2-6	132	22	2582×2403×2809
PF-1315	Φ1300×1500	680×1520	500	90-220	Y2-355M2-6	200	26	2930×2761×3053
PF-1320	Φ1300×2000	680×1570	500	110-280	Y2-355M2-6	250	29	3340×2950×3000

Specification and Technical Parameter of Impact Crusher (Three Adjustments)

Model	Specification (mm)	Feed Opening (mm)	Max. Feeding Size (mm)	Capacity (t/h)	Model of Motor	Power (kw)	Weight (t)	Overall Dimensions (L×W×H) (mm)
PFV-1007	Φ1000×700	400×730	300	25-45	Y250M-6	55	10.5	1800×1600×1800
PFV-1010	Φ1000×1050	400×1080	350	35-60	Y315S-6	75	14.8	2340×2007×2500
PFV-1210	Φ1250×1050	400×1080	350	45-100	Y315L1-6	110	18	2582×2053×2809
PFV-1214	Φ1250×1400	400×1430	350	60-140	Y315L2-6	132	23.5	2582×2403×2809
PFV-1315	Φ1300×1500	680×1520	500	70-180	Y2-355M2-6	200	28	2930×2761×3053