




STANDARD DAF

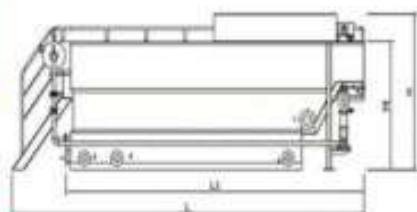

Enhance the DAF operation stability and separation efficiency based on our development and technology innovation for various applications in various industries.

Note:
Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

Core technology:

- Micro bubble generation technology
- Solid-liquid separation technology in scum zone
- DAF2 model cite the sedimentation theory

- Stable performance ,reliable operation.
- Huge markets,high cost-effective solution.
- Automatic scum removal, adjustable solid content according to actual demand.
- Hydraulic load 5-8 m/h.
- Packaged design, nice bending reinforcement appearance, anti-corrosion treatment and no blind angle.
- DAF2 model with "V" or "W" type sludge hopper is especially designed for wastewater with precipitation phenomenon.

型号 model	处理量Capacity		功率图 (kW) Power			规格尺寸 (m) Dimension			管口通 (DN) Nozzle list		
	(m ³ /h)	溶气泵 Recirculation pump	加压机 Air compressor	刮渣机 Skimmer	L/L ₁	W/W ₁	DAF H/H ₁	DAF2 H/H ₁	进液口 Inlet (a)	出液口 Outlet (b)	排渣口 Sludge outlet (c)
DAF-003	~ 3	0.75	0.55	0.2	3.6/2.8	2.4/1.16	2.2/1.7	/	50	50	100
DAF-005	~ 5	1.1	0.55	0.2	3.9/3.1	2.4/1.16	2.2/1.7	/	80	50	100
DAF/DAF2-010	~ 10	1.1	0.55	0.2	4.3/3.3	2.9/1.66	2.3/1.9	2.7/2.2	100	100	100
DAF/DAF2-020	~ 20	3.0/5.5	0.75	0.2	5.4/4.4	3.2/2.16	2.3/1.9	2.7/2.2	150	100	100
DAF/DAF2-030	~ 30	3.0/5.5	0.75	0.2	6.5/5.5	3.2/2.16	2.3/1.9	2.7/2.2	150	150	150
DAF/DAF2-040	~ 40	4.0/5.5	0.75	0.2	6.5/5.5	3.7/2.7	2.3/1.9	2.7/2.2	200	150	150
DAF/DAF2-050	~ 50	7.5	1.5	0.2	7.3/6.2	3.7/2.7	2.3/1.9	2.7/2.2	200	150	150
DAF/DAF2-060	~ 60	7.5	1.5	0.2	7.9/6.5	4.0/3.0	2.7/2.3	3.0/2.6	250	200	150
DAF/DAF2-080	~ 80	11	1.5	0.2	9.7/8.3	4.0/3.0	2.7/2.3	3.0/2.6	250	200	150
DAF/DAF2-100	~ 100	15	2.2	0.2	10.7/9.3	4.4/3.4	2.7/2.3	3.0/2.6	300	250	150
DAF/DAF2-120	~ 120	15	2.2	0.2	11.7/10.3	4.4/3.4	2.7/2.3	3.0/2.6	300	250	150
DAF/DAF2-150	~ 150	18.5	2.2	0.2	12.5/11.4	4.8/3.8	2.7/2.3	3.0/2.6	300	300	150