

CHOICES OF CLAMP CARRIER

- CC-20-8** # of clamps (6~14 clamps)
 # of section (6,8,12,16,10,30,40 section)
 *version of max working length (100",120",150&4.6m/5m)
 Max. working depth (38",44",50",&52")
 Max. working thickness (4" or 6")



Heavy duty clamps with zinc-plated, corrosion-resistant, 1"x2" rails and huge 7/8" screw provide super strength and durability. Clamps have a 3 1/2" high jaw and with accessories will laminate up to 6" (optional)



Pneumatic Panel Flattener & Extra Hold Down Bars Clamp

Very easily adjustable pneumatic panel flattener with a powerful clamping capacity. The extra hold down bars clamps is designed for stock thickness less than 3/4". The prevent boards from springing out of the clamps during tightening (optional)


Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!



CC-12-6 CLAMP CARRIER

Picture shown is a 12 section, 6 clamps for each section

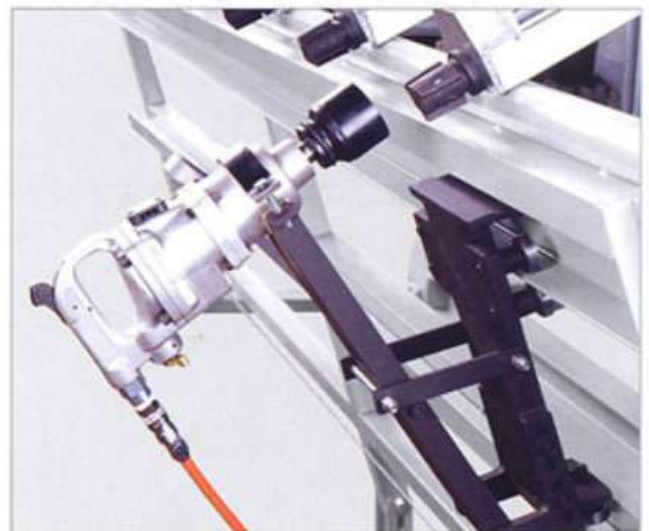

PNEUMATIC CLAMP CARRIER

The Pneumatic clamps lightener is standard for all clamps carriers has a very fast speed and an impact-style wrench wrench – although they are a little noisy.