


HORIZONTAL BORING MACHINE

CDH-4 & CDH-6

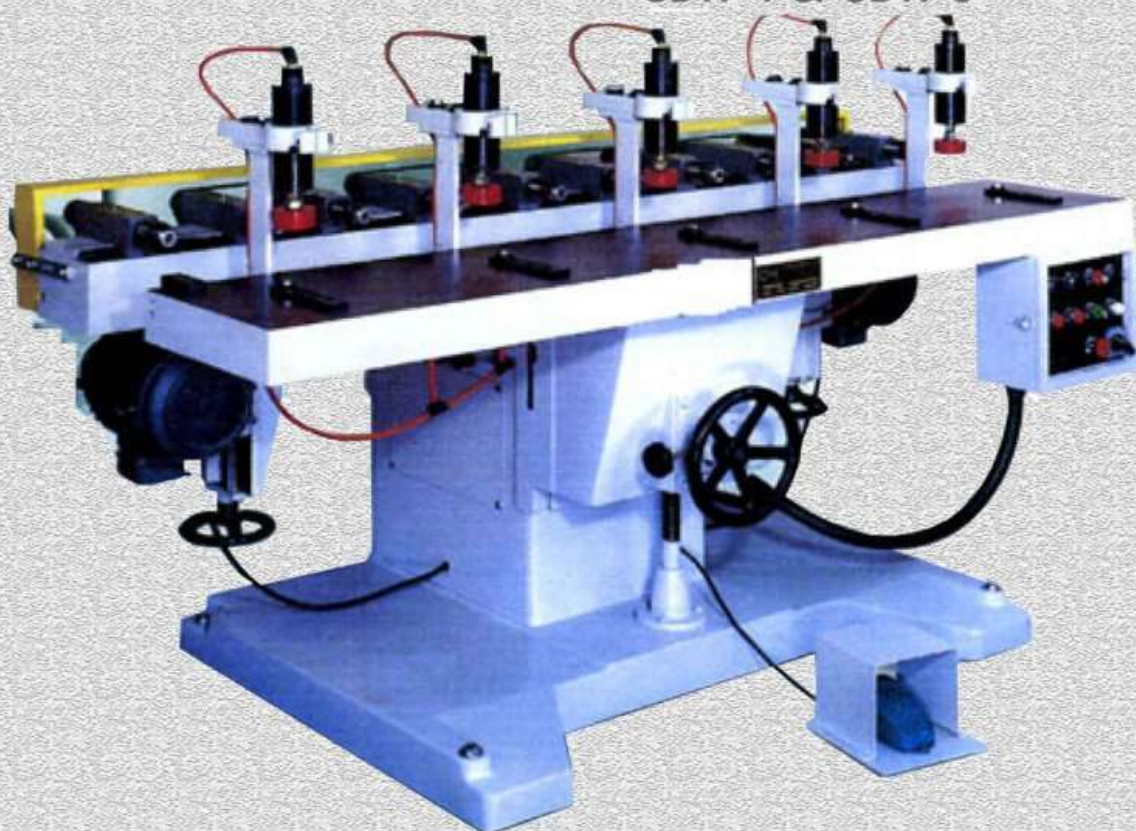

HS-1
1/2" Chuck
spindle 3500RPM

HS-2
3/8" Chuck
spindle 4500RPM

HS-3
For boring head spindle

CDH-6/CDH-4
Application examples

CBH-D3-D5
Pitch : 16mm~32mm available

MODEL	CDH-4	CDH-6
Spindle Motor	2HPx1	2HPx2
Spindle travel	100 mm	100 mm
Number of H-spindle	6	10
Number of idler wheel	5	7
Number of hold down clamp	3	4
Spindle speed R.P.M	HS-1-3500/60Hz HS-2-4000/60Hz	HS-1-3500/60Hz HS-2-4000/60Hz
Max. boring height spindle to table	60 mm	60 mm
Min. distance between drills	HS-1-50mm HS-2-40mm	HS-1-50mm HS-2-40mm
Table size	300x1260mm	350x1860mm
N.W/G.W	700/900 kgs	900/1100kgs