




SAFETY GUARD FOR CUT-OFF SAW (OPTIONAL)

All cut off saws feature complete safety for fast cutting operations. The saw blade is totally enclosed in the cabinet, and covered by the clamp while it raises to perform cutting. The operator's hands from approaching the cutting area. This assures the safest cutting operations

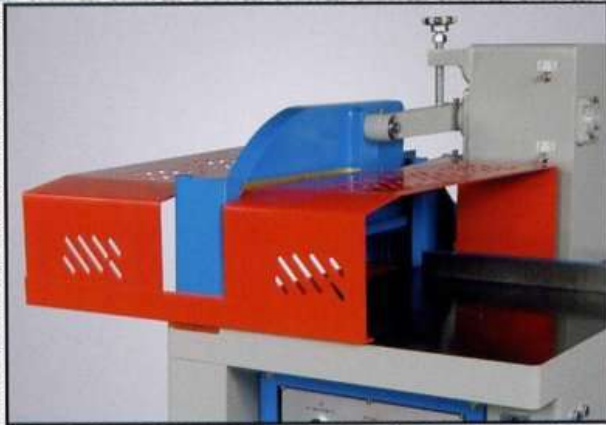

SWING STOPS

Swing stop is provided on the out feed roller conveyor, providing convenient length stops. It is ideal for repetitive cuts in a mass production line.



SAFETY SWITCH (optional)

When the operator's hands approach the cutting area, the safety switch will automatically be actuated to stop the machine as a safety guard.



DOUBLE SWITCH CONTROL (optional)

- Illustration of double start switch fitted as optional for all models. CE regulation is standard.
- Double switch control is for maximum safety of the operator.



EXCLUSIVE DESIGN

- Limit switch for adjustable cutting stroke
- The max. capacity up to 95 cuts/min. when adjusting the cutting stroke for stock thickness of 1" or less & narrow width piece for model HCS-14. (normal cutting capacity is about 45 cuts per minute)
- Convenient and fast saw blade replacement
- Proper dust collection design to keep machine inside clean.