




* 4-Side Straight Sanding M/C

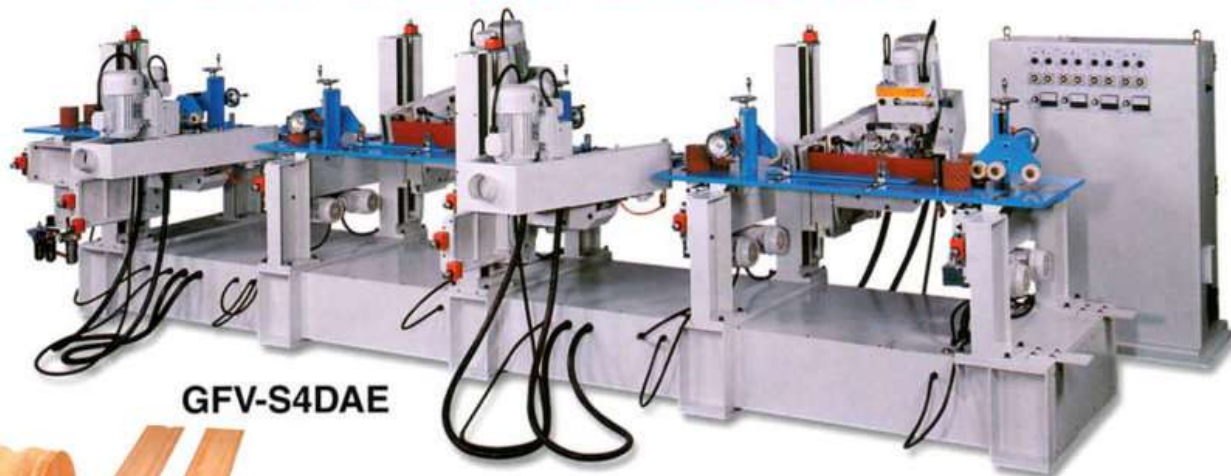

GVF-S4DAE

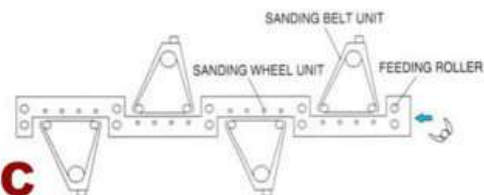

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

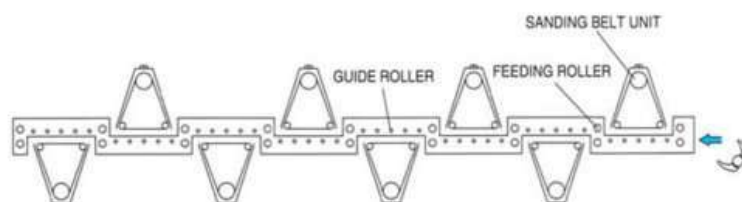

GVF-S8DAE

MODEL	GVF- S4DAE	GVF-58DAE
Min-Max working width	20 ~ 125 m/m	25 ~ 150 M/m
Min- Max working length	20 ~ 125 M/m	20 ~ 125 M/m
Min- Max working thickness	15~75 m/m	15~75 m/m
Sanding belt width	30~140 m/m	30~140 m/m
Sanding belt length	2450m/m	2450m/m
Belt tilt angle	45°-+100°	45°-+100°
Belt drive motor and speed	2.2kw x 4p / 0~1300M/min (4sets)	2.2kw x 4p / 0~1300M/min (8sets)
Oscillation motor	0.1kw x 4p (4 sets)	0.1kw x 4p (8 sets)
Type of feed	Step by step type	Step by step type
Conveyor drive motor and speed	02kw x 4p / 0~28M/min (10sets)	02kw x 4p / 0~28M/min (18sets)
Conveyor width / Quality	100m/m Flat pattern rubber belt	100m/m Flat pattern rubber belt
Conveyor number	10	18
Type of material hold down	Step by step roller hold down	Step by step roller hold down
Type of guide fence	Step by step	Step by step