

* 4-Side Straight Sanding M/C




DAE-S2W2



Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

DAE-S6F

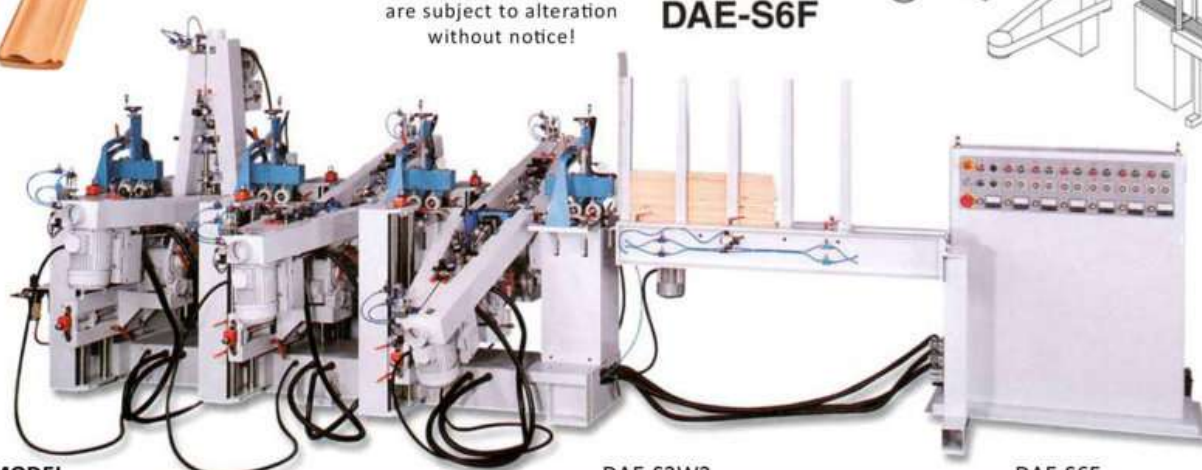

MODEL	DAE-S2W2	DAE-S6F
Min-Max working width	15 ~ 90 m/m	25 ~ 150 M/m
Min- Max working length	800 ~ 3000 M/m	600 ~ 3000 M/m
Min- Max working thickness	10~75 m/m	5~75 m/m
Sanding belt width	30~90 m/m	60~90 m/m
Sanding belt length	2450m/m	2450m/m
Belt tilt angle	45°~+90°	45°~+100°
Belt drive motor and speed	2.2kw x 4p / 0~1300M/min (2sets)	2.2kw x 4p / 0~1300M/min (6sets)
Oscillation motor	0.1kw x 4p (2sets)	0.1kw x 4p (4 sets)
Sanding wheel/ motor speed	2.2kw x 4 p / 0~180 rpm	
Sanding wheel tilts	10°~+90°	
Sanding wheel thickness	15-80m/m	
Sand wheel diameter	Ø200m/m	
Sponge belt width	100m/m	
Sponge belt length	850m/m	
Sponge wheel size	Ø175x100Lm/m	
Type of feed	Step by step type	Step by step type
Conveyor drive motor and speed	02kw x 4p / 0~28M/min (5sets)	02kw x 4p / 0~28M/min (4sets)
Conveyor width / Quality	100m/m Flat pattern rubber belt	100m/m Flat pattern rubber belt
Conveyor number	5	4
Auto feed driven motor		0.4kw x 4 kw
Type of material hold down	Step by step roller hold down	Step by step roller hold down
Type of guide fence	Step by step	Step by step