


* 4-Side Straight Sanding M/C



DAE-S6W4B2F

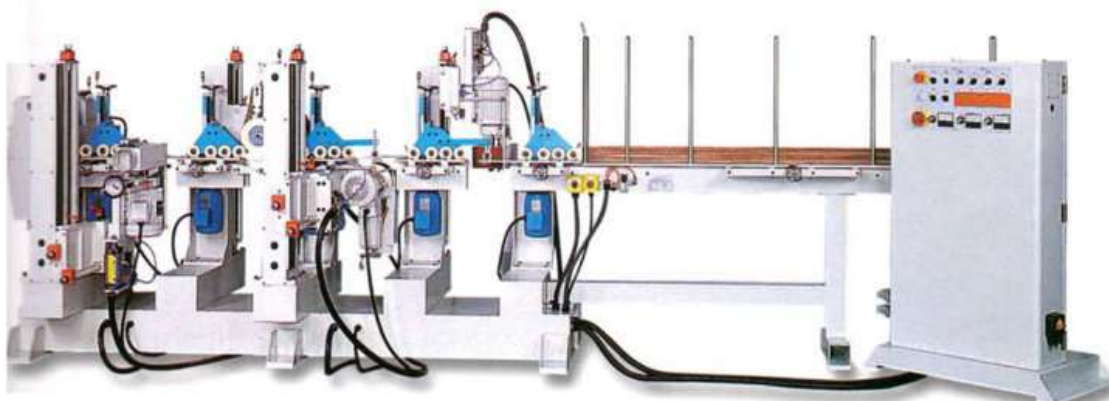

DAE-W4F

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

MODEL	DAE-S6W4B2F	DAE-W4F
Min-Max working width	25 ~ 125 m/m	5 ~ 100 M/m
Min- Max working length	1000 ~ 3000 M/m	800 ~ 3000 M/m
Min- Max working thickness	5~75 m/m	5~75 m/m
Sanding belt width	30~100 m/m	
Sanding belt length	2450m/m	
Belt tilt angle	45°~90°	
Belt drive motor and speed	2.2 kw x 4p / 0~1300M/min (6sets)	
Oscillation motor	0.1kw x 4p (6sets)	
Sanding wheel/ motor speed	2.2kw x 4 p / 0~180 rpm	2.2kw x 4 p / 0~180 rpm
Sanding wheel tilts	10°~90°	10°~90°
Brush wheel motor and speed	1/2HP x 4p / 0~1720rpm	
Sanding wheel thickness	15-80m/m	15-80m/m
Sand wheel diameter	Ø200m/m	Ø200m/m
Sponge belt width	100m/m	100m/m
Sponge belt length	850m/m	850m/m
Sponge wheel size	Ø175x100Lm/m	Ø175x100Lm/m
Type of feed	Step by step type	Step by step type
Conveyor drive motor and speed	02kw x 4p / 0~28M/min (12sets)	02kw x 4p / 0~28M/min (5sets)
Conveyor width / Quality	100m/m Flat pattern rubber belt	100m/m Flat pattern rubber belt
Conveyor number	12	5
Auto feed driven motor	0.4kw x 4p	
Type of material hold down	Step by step roller hold down	Step by step roller hold down
Type of guide fence	Step by step	Step by step