



*3-Side Straight Sanding M/C



GFV-W4DAE

Note :

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

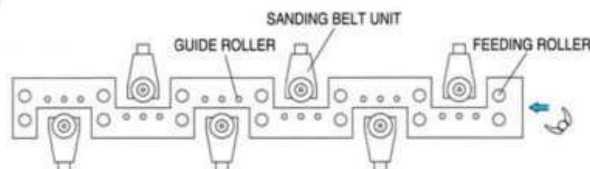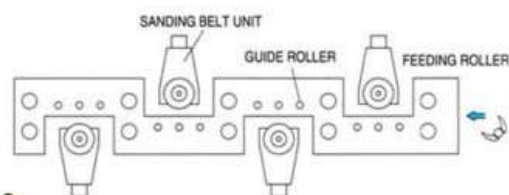

GFV-W6DAE

MODEL	GFV- W4DAE	GVF-W6DAE
Min-Max working width	15 ~ 150 m/m	15 ~ 150 m/m
Min- Max working length	500 ~ 1800 M/m	500 ~ 1800 M/m
Min- Max working thickness	5~75 m/m	10~75 m/m
Horizontal sanding wheel motor	3HP x 4HP(variable speed)	Spindle 3,4,5,6 2HP x 4HP(variable speed)
Horizontal sanding wheel size	Ø200x 15~140m/m	Ø250x 50~130m/m
Vertical sanding wheel motor	3HP x 4HP(variable speed)	Spindle 1,2 2HP x 4HP(variable speed)
Vertical sanding wheel size	Ø200x 15~90m/m	Ø250x 50~100m/m
Horizontal sanding wheel tilts	45°-+90°	Spindle 3,4,5,6 +45°-+90°
Vertical sanding wheel tilts	0°-+45°	Spindle 1,2 0°-+45°
Type of feed	Step by step with roller (vertical feed)	Step by step with roller (vertical feed)
Conveyor drive motor	¼ HP x 4P (applied with 5 sets of reducer)	¼ HP x 4P (applied with 7 sets of reducer)
Conveyor drive speed	0~30M (variable speed)	0~30M (variable speed)