




FILM LAMINATOR

No. 0810

PFM-108 automatic vertical high-speed laminating machine

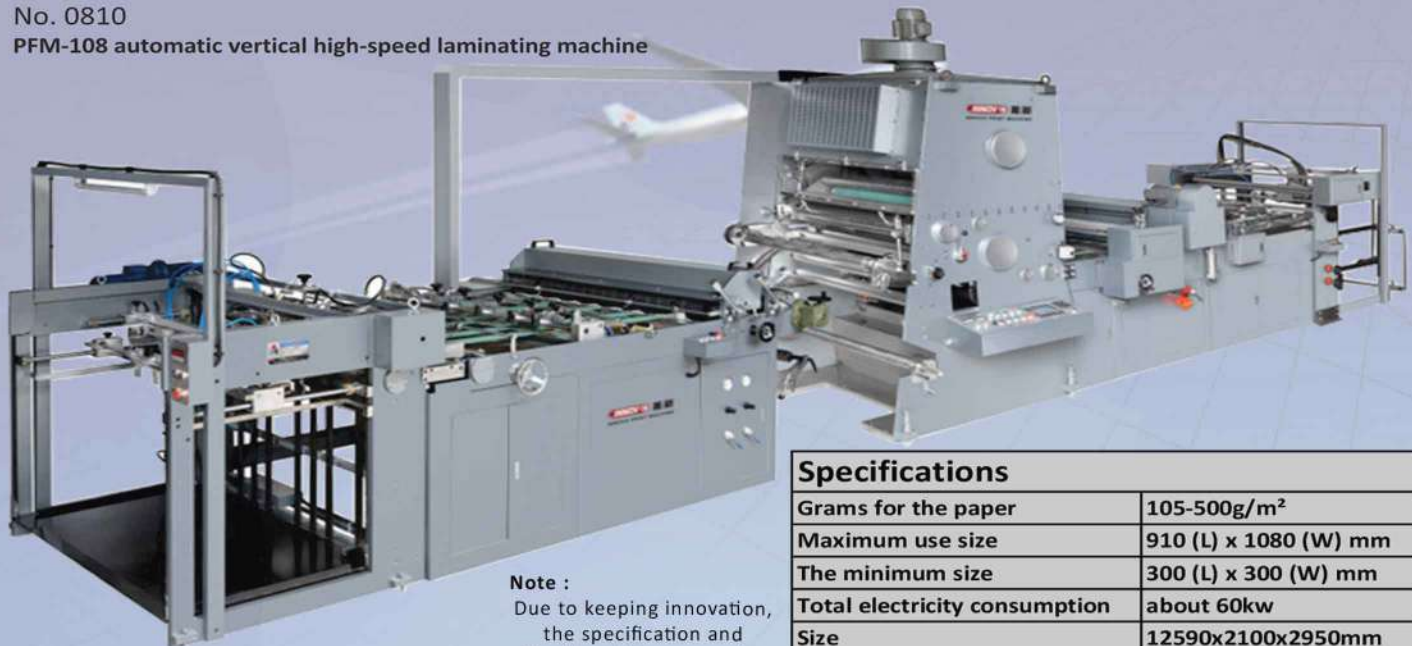

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Specifications

Grams for the paper	105-500g/m ²
Maximum use size	910 (L) x 1080 (W) mm
The minimum size	300 (L) x 300 (W) mm
Total electricity consumption	about 60kw
Size	12590x2100x2950mm
Weight	11000kgs
Wvoltage	380V/50Hz
Film speed	10-60m/min

DESCRIPTION

PFM-108 machine's configuration:

- automatic feed machine (non-stop pre-stack paper)
- Two-seat addition to powder devices (except electrostatic powder+brush powder)
- film host (coating, laminating and dry)
- automatic paper cutter (disc)
- Automatic closing machine (non-stop collection of paper)

PFM-108 machin's spare parts:

- The nozzle is automatically sent to the paper machine: 10 (a smoke, two of the five suction)
- automatic feed machine of steel brush:4
- drying heater:2
- Belt Cutter:2
- pressure sweep powder belt:2
- cutting blades: 8 (including spring)
- hydraulic cylinder seals: 2
- Toolbox: Group 1
- Operation / Maintenance / Electrical manual: 1 set

Applicable product range:

Apply glue: water-based glue, glue oily
For the film: OPP film, lamination film, no film, laser film
For paper: white card, gray, copper, Gold, Silver (100 grams paper proposed rolling, rolling the aircraft is equipped with devices)

No. 0811

Zx-520 series semi-automatic hydraulic laminating machine



STRUCTURE FEATURES

Zx-520/880/1200semi-automatic hydraulic laminating machine is manufactured according to the market requirement. It can do the complex and cutting at the same time, the anti-curve device can assure the paper smooth. It is made of thermal film, widely used for packing boxes, delicatessen boxes, and periodicals drawing and so on. The laminated products will be water-proof, legible, clear picture, and strong three-dimension etc.

- use frequency convesion, operate steady.
- concentrated electric control, operated by one person only.
- equipped with cutting device, it can be cut automatically after laminating.
- Use auto hydraulic supply system, the pressure of rising and dropping is automatic.
- the paper is not curling after cutting because of the device.
- Equipped with cutting and holing functions.

Specifications

Model	Max. paper	Temperature	Paper thickness	Max. laminating speed	Main power	Total weight	Dimensions
Zx-520	520x880mm	60-130°C	80-500g/m ²	0-30m/min	6.7kw	700kg	3650x1150x1450mm
Zx-880	780x1040mm	60-130°C	80-500g/m ²	0-30m/min	8.7kw	900kg	3780x1350x1450mm
Zx-1200	1100x1040mm	60-130°C	80-500g/m ²	0-30m/min	9.5kw	1100kg	3980x1550x1450mm