

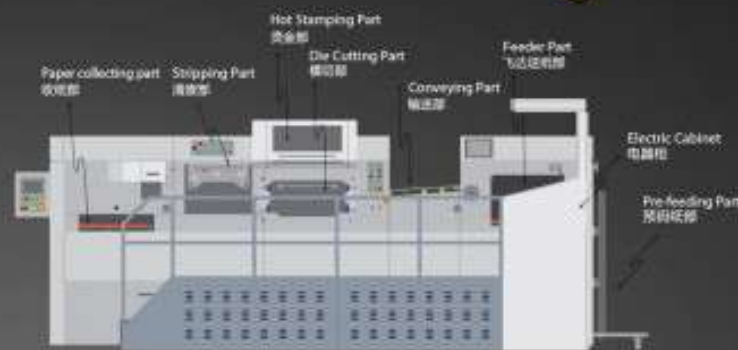



工艺流程 PROCESS FLOW

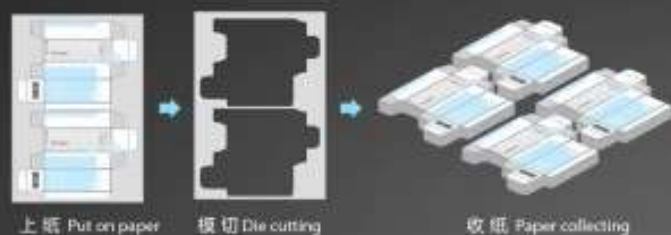

MHK-1050T/1050TC

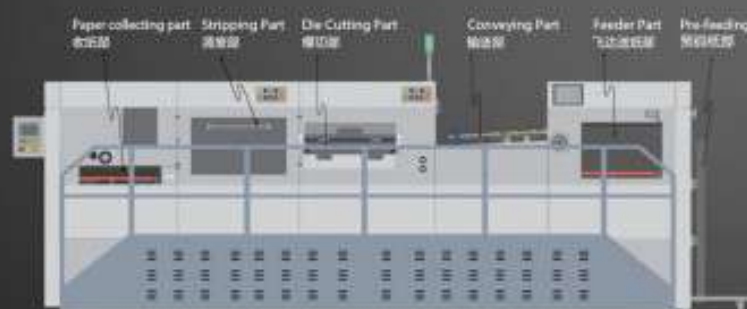

MHK-1050CE

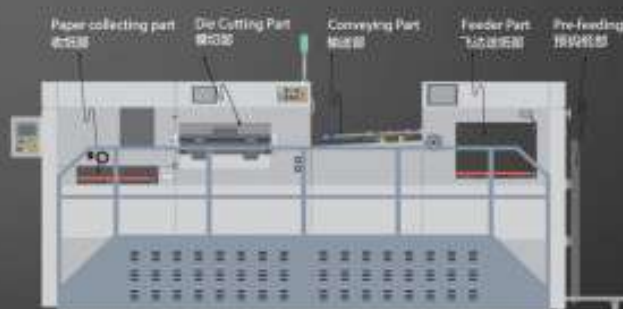

MHK-1050



Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

主要技术参数 Main technical parameter		MHK-1050T/TC	MHK-1050	MHK-1050CE
型号 Model		MHK-1050T/TC	MHK-1050	MHK-1050CE
最大模切幅面 Max. sheet size		1050 × 725mm	1050 × 720mm	1050 × 720mm
最小模切幅面 Min. sheet size		400 × 200mm	400 × 200mm	400 × 200mm
最大模切幅面 Max. die cutting size		1050 × 725mm	1050 × 720mm	1050 × 720mm
最大烫金幅面 Max. hot stamping size		1050 × 720mm	/	/
开口范围 Gripper range		9-17mm	9-17mm	9-17mm
内腔尺寸 Inner chamber size		1050 × 740mm	1050mm × 740mm	1050 × 740mm
送料范围 Stock range		80-2000gsm (单面/双面) ≤4mm (纸张厚度≤0.4mm)	80-2000gsm (单面/双面) ≤4mm (纸张厚度≤0.4mm)	80-2000gsm (单面/双面) ≤4mm (纸张厚度≤0.4mm)
模切精度 Die cutting accuracy		±0.1mm	±0.1mm	±0.1mm
最大工作速度 Max. die cutting force		300T	300T	300T
最大工作速度 Max. die cutting speed		7000次/小时 Die cutting	7000次/小时 Die cutting	7000次/小时 Die cutting
最大送料高度 Max. feeder pile height		1600mm (含送料架 wooden pallet included)	1600mm (含送料架 wooden pallet included)	1600mm (含送料架 wooden pallet included)
最大收纸高度 Max. delivery pile height		1400mm (含收纸架 wooden pallet included)	1400mm (含收纸架 wooden pallet included)	1400mm (含收纸架 wooden pallet included)
最大烫金直径 Max. gold foil diameter		250mm (垂直/水平) 200mm (垂直/水平)	/	/
电加热系统 Electric heated system		20通道, 40-150℃可调	/	/
温度范围 Temperature range		40-150℃ is adjustable	/	/
加热功率 Heat power		20-1000W	/	/
主电机功率 Main motor wattage		11kw	11kw	11kw
整机尺寸 Overall dimension		7700mm × 5200mm × 2900mm (不含送料架和收纸架, paper prepared track included)	6300mm × 4600mm × 2400mm (不含送料架, Vt platform included)	7700mm × 4600mm × 2400mm
机器重量 Net weight approx.		18.5T	16T	17T
满载功率 Full Load wattage		52kw	16kw	16.5kw