


Multiple Blade Saw MBS1300-X2



It is provided with a spindle at lower part and a fully-enclosed protective cover and realizes manual lifting of spindle and pressing frame. Rebound protector for plates (Patented Product) is available.

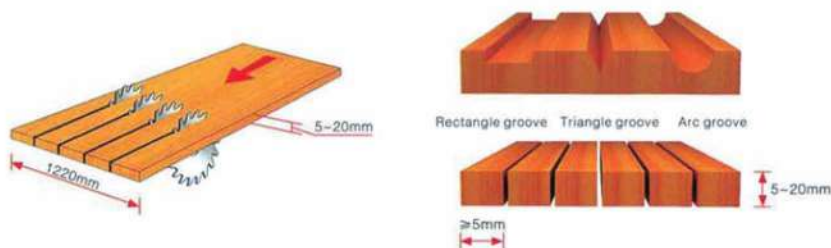

Technical Parameter			
Width of processed Material (mm)	Max. 1220: Min. 200	Power of Feeding Motor (kw)	1.5 (Optional to 3)
Thickness of Processed Roughcast (mm)	Max. 20: Min. 5	Total Power of Installed Motor (kw)	12.5 (Optional to 25)
Min. Processing Length (mm)	550	Feeding Speed (m/min)	0-12
Spindle Diameter (mm)	74	Pair Number / Number of Feeding Roller	4/8
Spindle Speed (r/min)	2600	Outer Diameter of Scrap Pipe (mm)	150
Saw Blade Diameter (mm)	205	Overall Dimensions (mm)	1850 x 1800 x 1250
Max. Number of Saw Blades (pcs)	30	Weight (kg)	1800
Power of Spindle Motor (kw)	11 (Optional to 22)		

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!