


Multiple Blade Saw MBS1300-X3



It is provided with a spindle at lower part and a fully-enclosed protective cover and realizes manual lifting of spindle and pressing frame. Rebound protector for plates (Patented Product) is available.

Application: Solid wood Composite floor reinforced composite floor panel furniture, environmental protection sound-absorbing panel, wood container glue-laminated board, photo frames, and bed bases. It can saw one plate into several parts in same or different specifications, or is used for grooving on surfaces of boards. Precision saw spindle can make sure the sawed plates are more accurate in finish and straightness.

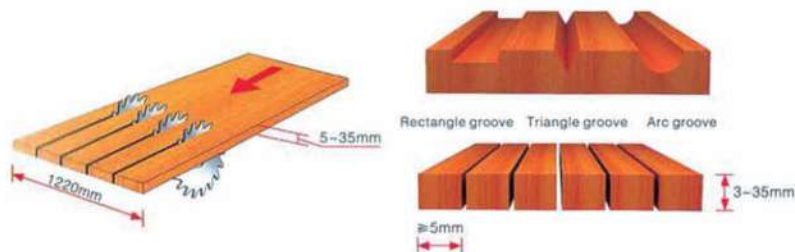

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

Technical Parameter

Width of processed Material (mm)	Max. 1220: Min. 200	Power of Feeding Motor (kw)	1.5 (Optional to 3)
Thickness of Processed Roughcast (mm)	Max. 35: Min. 5	Total Power of Installed Motor (kw)	12.5 (Optional to 25)
Min. Processing Length (mm)	550	Feeding Speed (m/min)	0-12
Spindle Diameter (mm)	74	Pair Number / Number of Feeding Roller	6/12
Spindle Speed (r/min)	2600	Outer Diameter of Scrap Pipe (mm)	150
Saw Blade Diameter (mm)	205	Overall Dimensions (mm)	2200 x 1800 x 1250
Max. Number of Saw Blades (pcs)	60	Weight (kg)	2200
Power of Spindle Motor (kw)	11 (Optional to 22)		