


POWER, STABILITY AND UNCOMPROMISING PRECISION



THE MOST HIGH-QUALITY
STRAIGHT LINE RIP SAW
FOR EDGE TRIMMING,
RIPPING

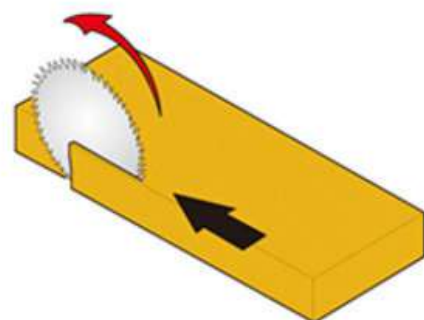

Note :

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

THE DIFFERENCES BETWEEN THE HR-303 AND THE 303S

MODEL	HR-303	HR-303S
Feeding speed	3 speed	Variable speed (1 HP)
Guide fence	Normal	Precision gear type
Side safely guard	-	Standard
Bottom kickback	-	Standard
With digital readout of elevation wheel for pressure rolls	-	Standard
New precision type of chain block (140 width)	-	Standard

Specification

MODEL	HR-303	HR-303S
Maximum working thickness	85 mm	85 mm
Saw blade diameter	Ø200~303 mm	Ø200~303 mm
Distance from blade to arm	400mm	400mm
Table surface area	1310 x 780mm	1310 x 780mm
Feed speed	15/20/25m/min (3 speed)	15~25m/min (variable)
Saw arbor diameter	Ø 1" (25,4mm)	Ø 1" (25,4mm)
Saw arbor motor	10HP	10 HP (15 HP and auto, star switch is optional)
Feed motor	1HP (2HP and variable speed is optional)	1 HP (2HP and variable speed is optional)
Saw arbor speed	4200RPM (60Hz)	4200RPM (60Hz)
Dust exhaust outlet diameter	Ø5"	Ø5"
Width of chain block	130mm	140mm
Net weight	900kgs	950kgs
Gross weight	1050kgs	1100kgs
Machine dimension (L x W x H)	1400x1020x1338mm	1400x1020x1338mm
Packing dimensions (L x W x H)	1500x1100x1500mm	1500x1100x1500mm