




DOUBLE SURFACE PLANER

HK-400

OUTSANDING FEATURES

- The TABLE surface is Hard Chrome Plated and precision ground for smooth performance and maximum wear resistance at high speeds
- The dovetailed slide ways on the table elevation ensures stability and rigidity
- A torque limiter equipped on the feed transmission mechanism allows the spike conveyor to stop automatically in case of overload
- Both the top and bottom cutter- heads can be fitted with spiral cutter-heads on request
- Corrugated, sectional in feed rollers
- European standard switch control panel with main switch breaker
- A feed rate variation from 7 to 20 meters per minute
- An economical models
- 405mm width capacity
- 3 table rollers
- Ideal for planning short work pieces

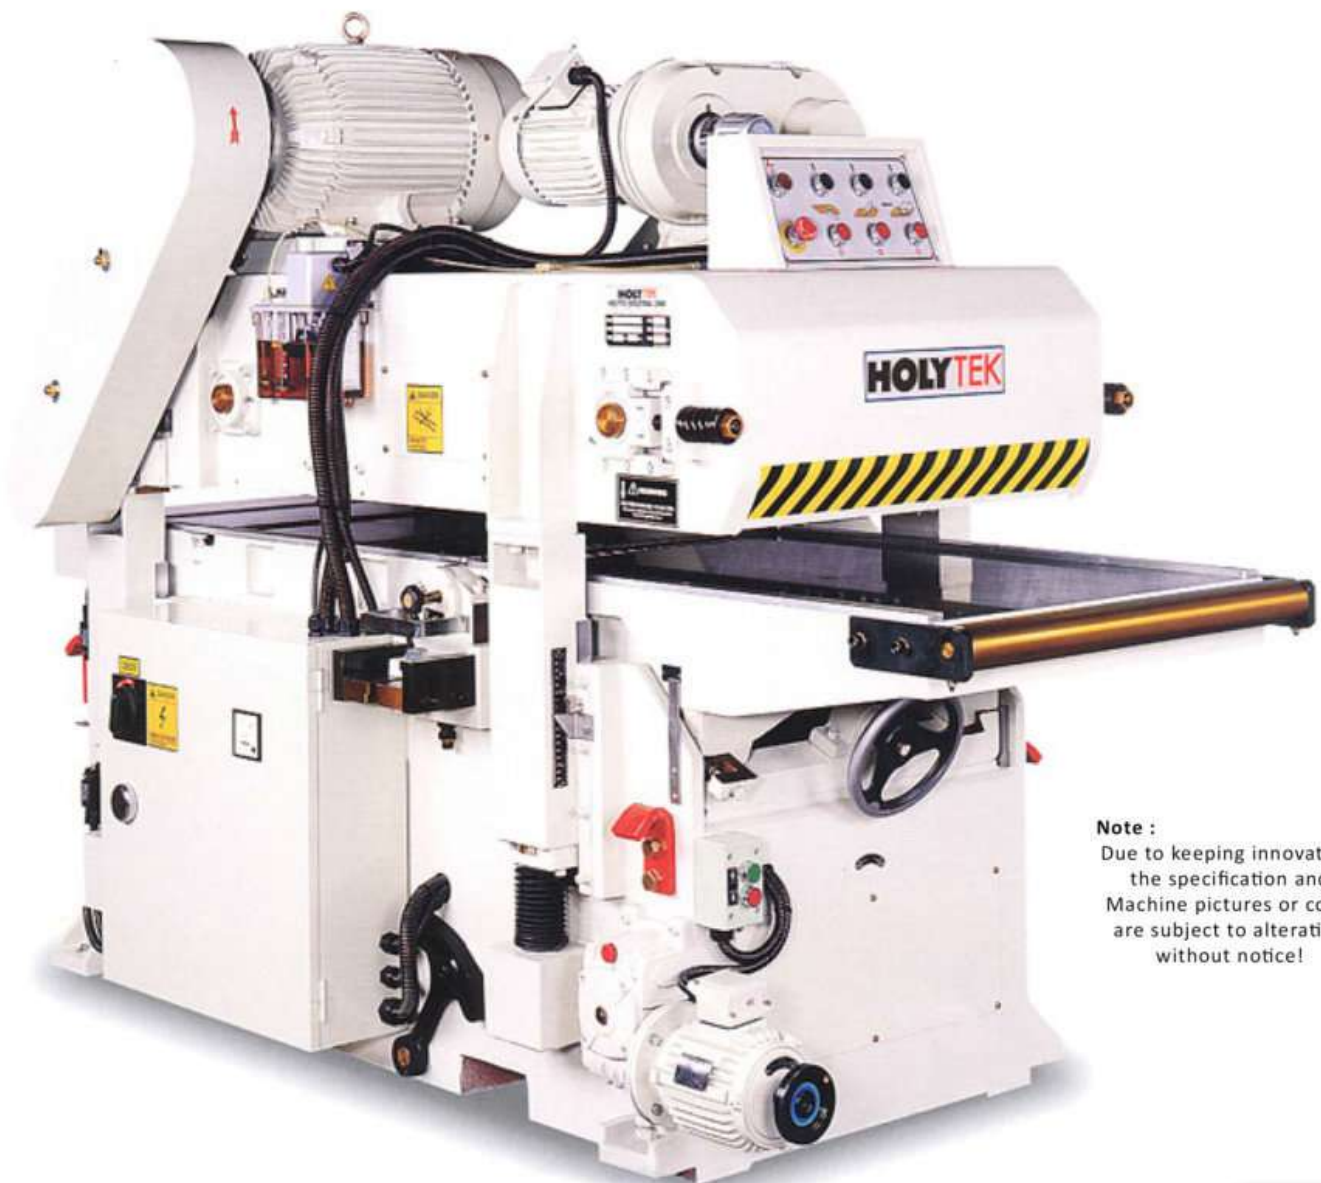

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!