



DOUBLE SURFACE PLANER



POWERED TABLE ELEVATION

The elevation is powered by a ½ HP motor to ensure fast and convenient thickness adjustment.



WELL LAID OUT PRESSURE SPIKES

The pressure spikes are overlapped with a minimum of gaps, holding the work piece firmly and uniformly. This ensure vibration free feeding even for short work piece.



FAST KNIFE ADJUSTMENT

With pneumatic wrench, the lower tool head can be pulled out, reducing the tool-replacing time.



FAST AND CONVENIENT BELT TENSION ADJUSTMENT

Simple loosen the lever to quickly adjust or replace the belt.

STANDARD ACCESSORIES

- Simple knife setting dial gauge
- Simple thickness set-up
- Plain cutter-head
- Table bottom rollers
- Start- delta motor starter
- Auto lubrication for caterpillar chain quick-ways
- Quick belt tension adjustment


Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!



SIMPLE THICKNESS SET UP

An identical wood block sample can be used as a template for simple and fast setting up. (except model : HK-610B,400).

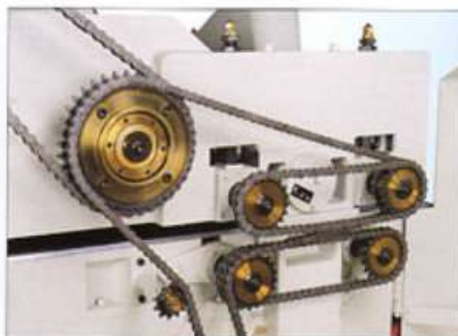

EFFICEINT TRANSMISSION MECHANISM

The transmission mechanism consist of a chain and a sprocket, which drives the in feed rollers and two table rollers. (picture showing of HK-610)



MANUAL OIL-FILLING SYSTEM

Assembly of manual oil filling system, easy for lubrication maintenance to each lifting slide seat (Except model : HK-610B, 400)