



SUPER MD

4 Side Planer / Moulder



Extra air cylinder pressure (optional)


Air cylinder pressure on the top of indeed table is optional. Side air pressure is optional for MD-230 mm and 260 mm, standard for MD-300 mm and high speed feeding series.



Horizontal spindle with jointer device (optional)

Horizontal spindle with remote-controlled straight knife jointer and automatic profile jointers provide accuracy and super surface quality, especially good for high speed feeding. 60M/80M/per min.

PT. Valtekindo Global Intertek

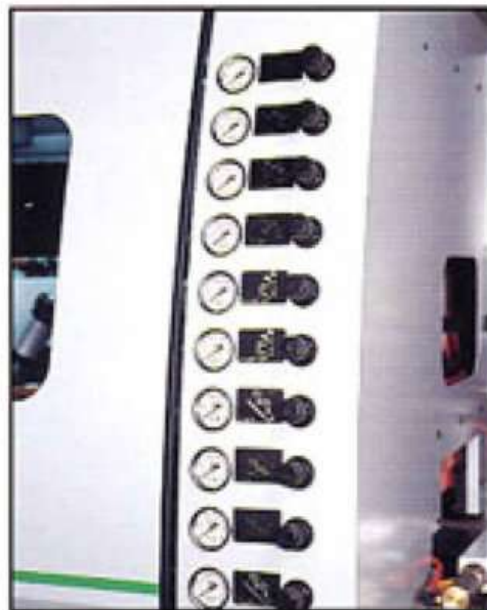

Individual adjustable pneumatic pressure gauges for different



Hydraulic clamped outboard bearing system (optional)

Standard attachment for MD-300 mm series and high feeding speed series- 60 M/80M/ per min.

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

HO-10