


**DT-66A**

- The machine is constructed of upper and lower circular saw blades and followed with molding spindles at both ends. Designed for Performing burr-free cutting and molding at both ends in a single pass.
- Specially designed circulated chain feed system greatly upgrades machining efficiency.
- Japan-imported chain features high quality, maximum wear resistance and long service life.
- Plastic steel chain blocks assure maximum wear resistance and maximum feed smoothness.
- Separately mounted control box provides added operational convenience.
- Synchronized feed at both ends ensures out standing molding accuracy.
- A digital controller provided on the control panel for operational convenience and high accuracy of cutting length.
- Feed chain rail employ an automatic lubrication system.
- Variable feed speed makes the machine ideal for cutting various soft and hard wood materials.



Thickness of cut at both ends can be set as desired.

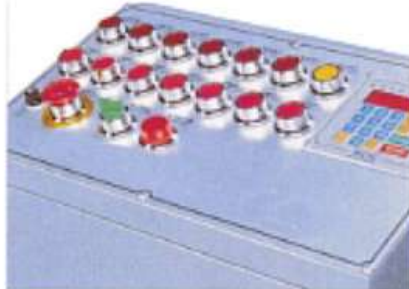

Centralized control panel has a digital controller for width of cut control.



Automatic lubrication for chain and rail. Variable feed speed can be set as desired.

Model	DT-46A	DT-66A	DT-86A
Processing length	300-1200mm	300-1800mm	300-2400mm
Feeding speed	1 HP (1~15m/minute)		
Circular sawing blade (special accessory)	250mm (10")		
Inclined angle of circular sawing blade	45°		
Turning speed of circular sawing blade	3300-3650R.P.M 50~60Hz		
No. of rails	2 Sets		
Circular saw blade motor	3 HP x 4		
Vertical shaft motor	5 HP x 2		
Diameter of vertical shaft	Φ30 mm		
Turning speed vertical shaft	6600-7200R.P.M 50~60Hz		
N.W / G.W	1250 / 1500 kg	1700 / 2000kg	2100 / 2500 kg
Machine Size (LxWxH)	2400x2200x1400mm	2980x2200x1400mm	3580x2200x1400mm
Shipping Size (LxWxH)	2350x2300x1625mm	3100x2300x1625mm	3700x2300x1625mm

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!