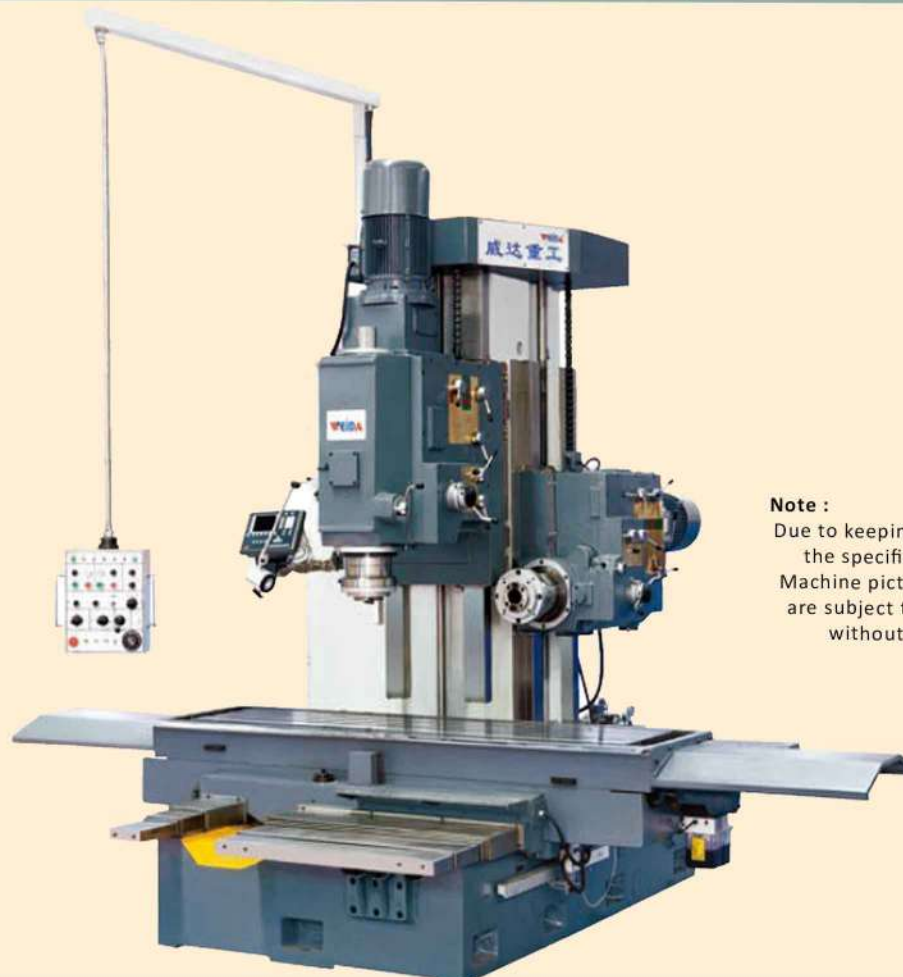


TX706

Universal vertical/horizontal boring & milling

**Note :**

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Specifications	Units	TX706
Table size	mm	2400 × 650
Table travel (X,Y)	mm	1630 × 550
Vertical travel of horizontal spindle	mm	800
Vertical travel of vertical spindle	mm	800
Min. distance from hor. spindle axis to table	mm	20
Number/Width/Distance of T-slot	mm	5-22-100
Spindle taper		立 (V)ISO50, 卧 (H)ISO50
Spindle quill travel	mm	立 (V)190, 卧 (H)190
Spindle speed range	rpm	立 (V)19-860, 卧 (H)19-860
Spindle speed steps		立 (V)12, 卧 (H)12
Longitudinal, transverse feed speed range stepless	mm/min	20-2200
Longitudinal, transverse rapid feed speed range	mm/min	2200
Quill auto-feed speed steps		立 (V)6, 卧 (H)6
Quill auto-feed speed range	mm/r	立 (V)0.05-0.4, 卧 (H)0.05-0.4
Spindle motor power	kW	立 (V)11, 卧 (H)11
Feed motor power	kW	4.4
Max. load of worktable	kg	3000
Overall dimension (L × W × H)	mm	4100 × 3700 × 4250
Machine weight	kg	17000