



TH170

vertical honing machine



Hydraulic vertical honing machine with head provided with pneumatic system for an easy honing spindle longitudinal and transversal positioning on the workpiece. The block supporting base is adjustable in the height and inclination to allow the assembling of flat and "V" blocks. Honing spindle with steplessly variable rotation speed visualized on the control panel.

Technical Specifications


Maximum honing diameter	Φ 170 mm
Minimum honing diameter with automatic expansion honer	Φ 35 mm
Honer max. stroke	300 mm
Cylinder bearing plate vertical stroke	200 mm
Workpiece max. length	1200 mm
Cylinder bearing plates width	400 mm
Workpiece max. length	600 mm
Spindle head longitudinal stroke	1100 mm
Spindle head transversal stroke	80 mm
Spindle head motor	2 HP
Hydraulic plant motor	1.5 HP
Electropump power	0.30 HP
Spindle rotating speed	100-300 rpm
Spindle alternative motion speed	0-18 m/min
Overall dimensions(L×W×H)	1800×1300×2200 mm
Packing dimensions(L×W×H)	2000×1500×2400 mm
N.W./G.W.	1200 /1400 kg

Standard Accessories

low voltage electric plant (24 volts)
hydraulic power pack
electropump cooling system (settling vat)
honing head moving and clamping pneumatic plant
V and flat engine-blocks bearing unit(rotating table).
splash guards and vat (base plate)
couple of quick clamps
pair of parallel supports
set of service tools

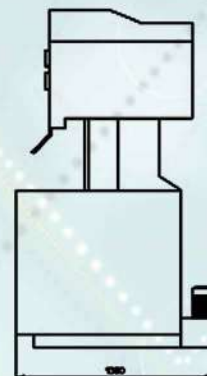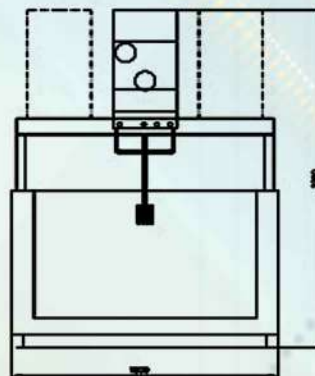

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

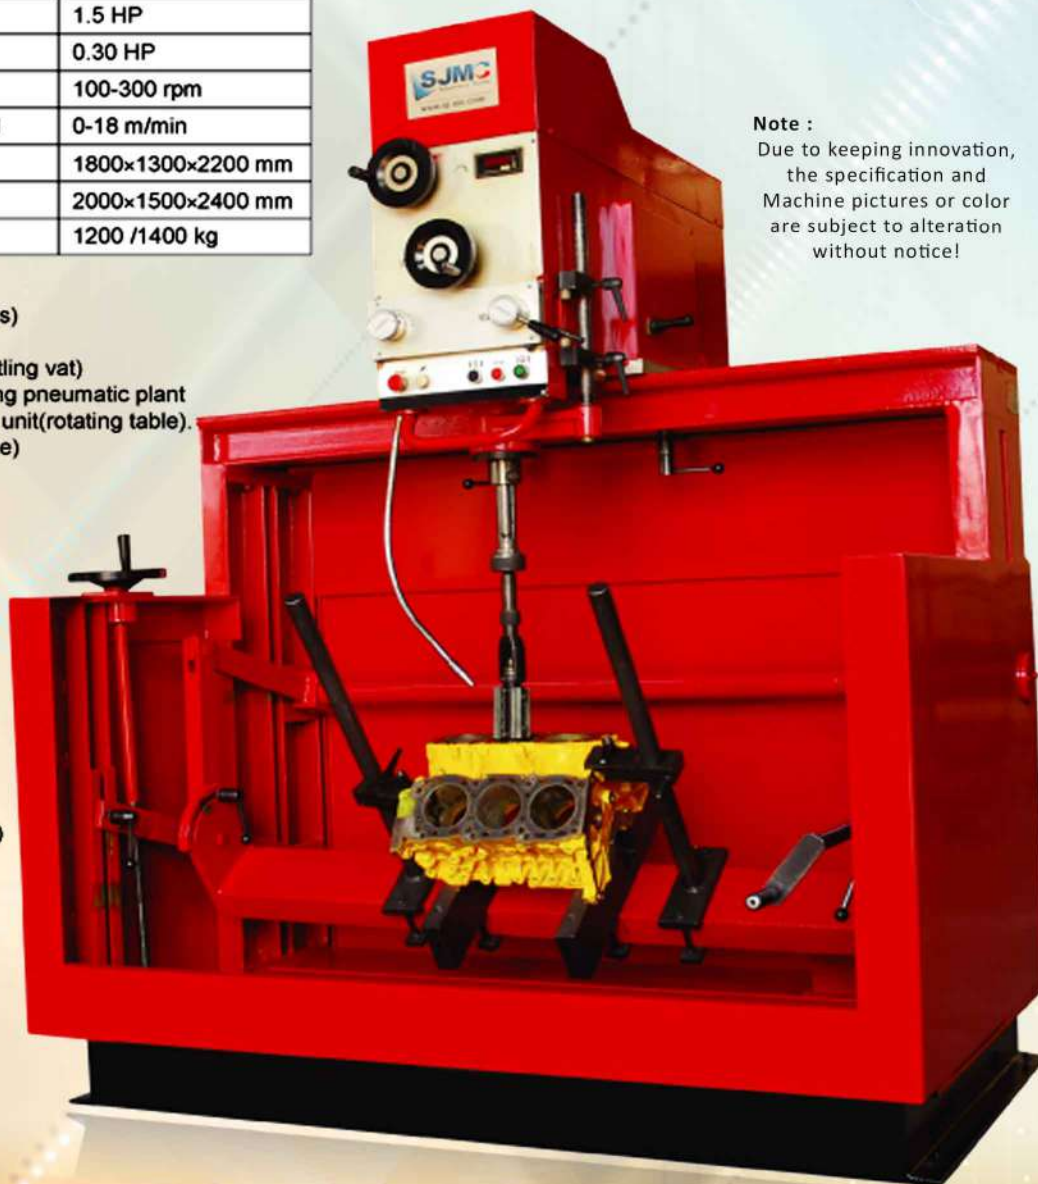

MT25
(Φ 25- Φ 33mm)



MT31
(Φ 31- Φ 44mm)



MT44
(Φ 44- Φ 66mm)



MT63
(Φ 63- Φ 170mm)