




Hydraulic Swing Beam Shearing

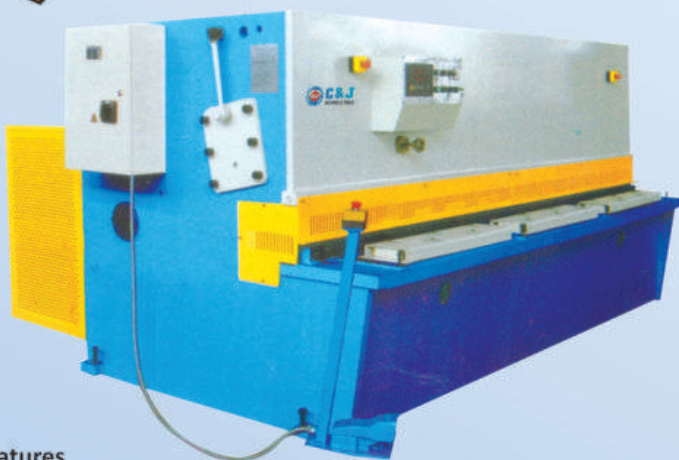

Features

- Welded frame stress relieved for reliability
- Hydraulic drive, return of knife beam is smooth and prompt by accumulator or nitrogen cylinder
- Manual adjustable blade clearance
- Front and side safety guards
- Back gauge with two photo – electric guards
- Swing up electric back gauge
- Chinese high quality gear pump
- American OMG valve ,
- Japanese sealing rings ,
- E10 LCD Display ,
- CE electrical components.

OPTIONAL ACCESSORIES :

- Single axis Italian Mapper programming
- HT071 positioner

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

	Model No.	Max.Shearing Thickness(mm)	Max Shearing Width (mm)	Shearing Angle	Number Of Stroke	Back Gauge Range (mm)	Motor Power (kw)	Net Weight (kg)	Size(LxWxH)(cm)
QC12Y	4x2500	4	2500	1°30'	20	20-480	5.5	3800	313x203x160
	4x3200	4	3200	1°30'	20	20-600	5.5	5600	384x218x160
	4x4000	4	4000	1°30'	18	20-600	5.5	7000	464x232x160
	6x2500	6	2500	1°30'	18	20-600	7.5	5200	313x232x160
	6x3200	6	3200	1°30'	16	20-600	7.5	6500	384x232x162
	6x4000	6	4000	1°30'	14	20-600	7.5	8500	463x250x170
	6x6000	6	6000	1°30'	6	20-600	9	16800	665x250x225
	8x2500	8	2500	1°30'	14	20-600	11	6200	314x235x162
	8x3200	8	3200	1°30'	12	20-600	11	7300	385x235x162
	8x4000	8	4000	1°30'	10	20-600	11	9600	463x250x170
	8x6000	8	6000	1°30'	6	20-600	15	17600	665x285x170
	12x2500	12	2500	1°30'	12	20-800	18.5	9600	324x305x210
	12x3200	12	3200	1°30'	10	20-800	18.5	12000	395x305x210
	12x4000	12	4000	1°30'	8	20-800	18.5	14500	475x321x220
	12x6000	12	6000	1°30'	5	20-800	22	29500	675x343x230
	16x2500	16	2500	2°	8	20-800	22	11600	341x323x223
	16x3200	16	3200	2°	7	20-800	22	14000	412x323x223
	16x4000	16	4000	2°30'	6	20-800	22	16800	492x333x270
	20x2500	20	2500	2°30'	8	20-800	37	17500	342x333x270
	20x3200	20	3200	2°30'	7	20-800	37	25500	418x333x270
	20x4000	20	4000	2°30'	6	20-800	37	29000	498x348x283
	25x2500	25	2500	2°30'	8	20-800	45	24000	348x343x270
	25x3200	25	3200	2°30'	7	20-800	45	32000	418x343x270
	32x2500	32	2500	3°	6	20-800	55	33000	376x441x315
	32x3200	32	3200	3°	6	20-800	45	40500	459x441x315