


HD-650CE Needle Detector

Characteristics:

1. Adopt high-quality ABS enclosure, beautiful appearance, light weight;
2. Able to calculate the qualified products, rejects and total amount;
3. Able to detect the thick material and super thin material respectively;
4. Equipped with the controlling apparatus which can correct the conveying belt
5. Fully computer-control auto switch, no need to push start button frequently;
6. Automatic power-saving function with environment-saving principle;
7. Equipped with environment monitor which can directly look over the work environment of machines
8. Broken-needle location indicator which can find the location of broken needle directly;
9. With auto-alarm and auto-return function;
10. It features good immunity, high reliability, and stable sensitivity;

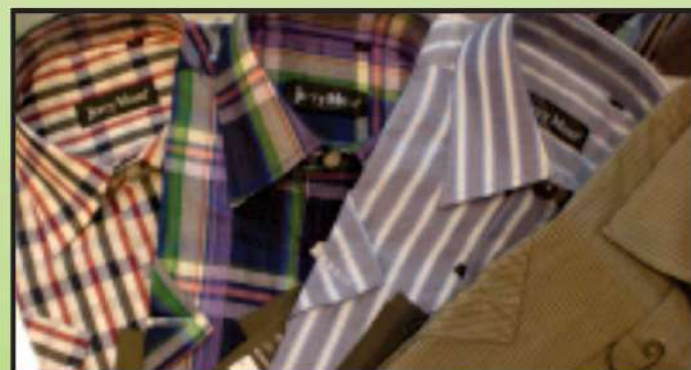

Performance:

Detecting Mode	: Magnetic Induction
Detecting Capacity	: iron ball ϕ 0.8mm – 1.00mm
Sensitivity set	: Stepless
Detecting width	: 600mm
Detecting height	: 100mm
Alarm mode	: Beep
Conveyor speed	: about 30m/min
Power	: Single-phase 220V, 50Hz
Consumed power	: about 110W
Dimension	: 1050 (L) x 1650(W) x 900(H)mm
Weight	: about 190kg

Note :
Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

