



SXF1358C SXF1358C Uni Lapper/D


Main Specifications:

型号/Model	SXF1358C
料斗容量/斗容量	24-28 吨
喂入速率/喂入量 Feed weight (g/min)	2-7g/min
搭接最大直径 Lap dia. (Maximum)	Φ550mm
输出速率/产量 Delivery weight (g/min)	50-80g/min
送带速度 Delivery speed (m/min)	80-120m/min
叠材范围/Stacking range	1.22-1.80
叠材头数/No. of stacking zone	2
叠材形式/Stacking system	三上三下, 气动称重 2-over-3 pneumatic weighing
叠带规格/Car size	Φ600 × 1200mm 自动喂入 (Cover feed)
使用风量/Consum capacity	2500m³/h
空气压力/Air pressure	6 × 10bar
耗风量/Air consumption	24m³/h
控制系统/Control system	可编程控制 (PLC)
电机功率/Motor power	主电机 11kw Main motor 喂料电机 3kw
外型尺寸/Overall dia. (mm)	3242 × 3201 × 3000mm (总高度含斗架 5A/B) (Total) 2132 × 4752 × 3000mm (总高度含斗架 1) (Total)

Note:

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

Scheme of Foundation with automatic hoist

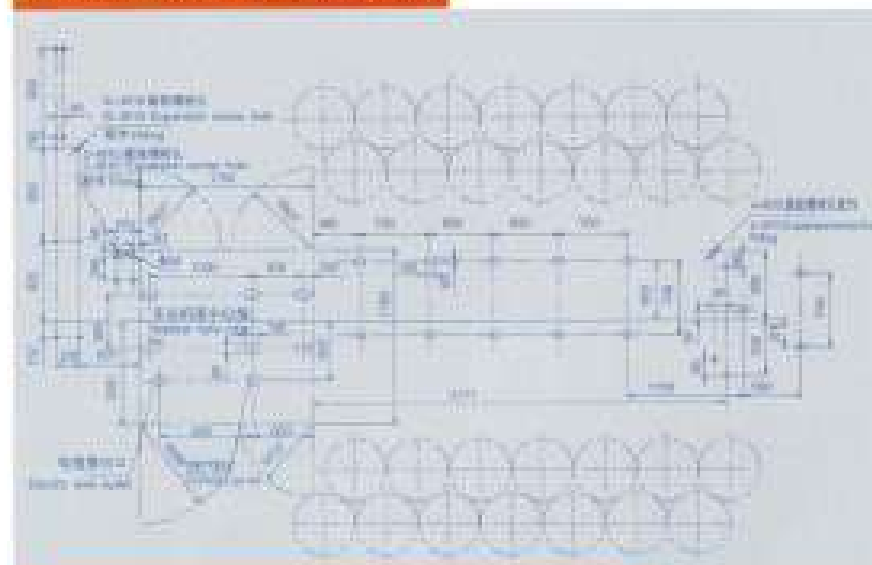

Scheme of Foundation with fixed lap shelf

