

Full automatic Three-color strap injection moulding machine

Use and character:

1. PLC program control of industrial man-machine interface/Display of tactile screen/Quick speed/Precise measurement/Full automatic operation.
2. The working statement is monitored all the while, for person to adjust the parameters easily if necessary.
3. It is applied to produce one-color/two-color soles, uppers and strap.
4. The machine has economy design, it takes up only small space, saving energy, asking for fewer operators.


Suitable material: PVC、TPR

Produce: various kinds of PVC & TPR strap.

Note :

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

KR2512-X3

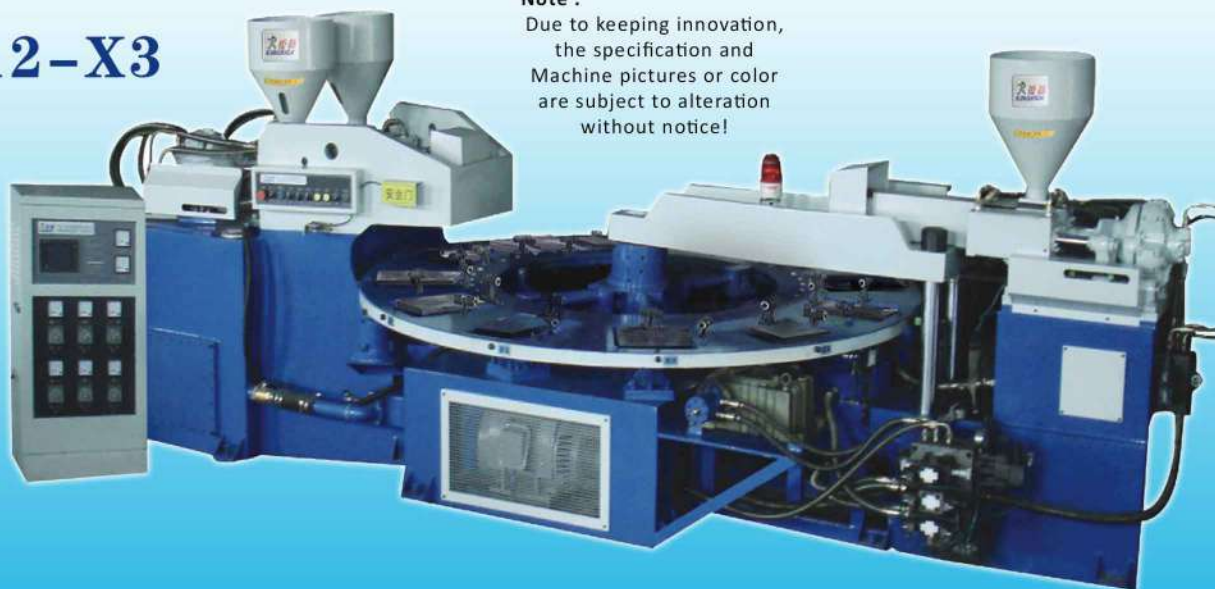

项目Items	单位Units	KR2506-X3	KR2506-X3	KR2506-X3
加工原料Material	kind	PVC\TPR	PVC\TPR	PVC\TPR
工位数Work stations	stations	6	10	12
注射容量Injection capacity (Max.)	g	250/250X2	250/250X2	250/250X2
螺杆直径Diameter of screw	mm	45/45X2	45/45X2	45/45X2
注射精度Injection measuring accuracy	g	±0.5	±0.5	±0.5
额定注射压力Injection pressure	kg/cm ²	900X3	900X3	900X3
螺杆转速Rotate speed of the screw	r/min	1-180	1-180	1-180
合模力Clamping pressure	kn	700X2	700X2	700X2
模板尺寸Mold size	mm	400X360X180	400X360X180	400X360X180
加热功率Power of heating plate	kw	13.5	13.5	13.5
电机功率Power of motor	kw	11+15	11+15	11+15
油泵压力Oil pump pressure	mpa	21X2	21X2	21X2
总装机容量Total power	kw	39.5	39.5	39.5
机器尺寸Dimension(LxWxH)	M	4.5X2X2	5X2.5X2	5X2.5X2
机器重量Machine weight	T	15.8	16.0	16.3